

# Product Details and Certifications

## Cross Reference RA Part Number: 100-SA01 B

 **Product: 100-SA01**

Description: Auxiliary Contact Block, Side Mounting, 0 N.O. 1 N.C.  
Left / Right Side



Representative Photo Only (actual product may vary based on configuration sections)

### **ACCESSORY SELECTION**

---

Bulletin Number	100-C Contactor Accessories
Accessory Selection	Individual Accessory Selection



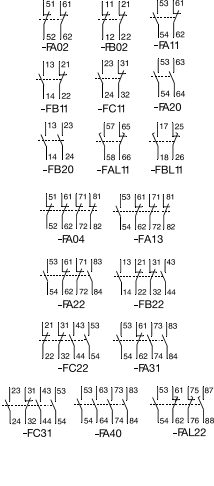














### **APPLICATION DATA**

---

For Use with	Contactors 100-C all
--------------	----------------------

**Auxiliary Contacts (For 100-C09...C97 contactors)**

2

	Description			Connection Diagrams	For Use With	Standard Auxiliary Contact Cat. No. ‡	Bifurcated Auxiliary Contact Cat. No.
		N.O.	N.C.				
 <p><b>Auxiliary Contact Blocks for Front Mounting*</b></p> <ul style="list-style-type: none"> <li>• 2- and 4-pole</li> <li>• Quick and easy mounting without tools</li> <li>• Electronic-compatible contacts down to 17V, 5 mA</li> <li>• Mechanically linked performance between N.O. and N.C. poles and to the main contactor poles (except for L types)</li> <li>• Models with equal function with several terminal numbering choices</li> <li>• 1L = Late break N.C./early make N.O.</li> <li>• Bifurcated version for switching down to 5V, 3 mA also available</li> </ul>		0	2		100-C all	100-FA02	100-FAB02
		1	1		C30⊗00...C97⊗00	100-FB02	100-FBB02
		2	0		100-C all	100-FA11	100-FAB11
		1L	1L		C30⊗00...C97⊗00	100-FB11	100-FBB11
		0	4		C09⊗10...C23⊗10	100-FC11	100-FCB11
		1	3		100-C all	100-FA20	100-FAB20
		2	2		C30⊗00...C97⊗00	100-FB20	100-FBB20
		3	1		100-C all	100-FAL11	—
		4	0		C30⊗00...C97⊗00	100-FBL11	—
		1+1L	1+1L		100-C all	100-FA04	100-FAB04
					100-C all	100-FA13	100-FAB13
	 <p><b>Auxiliary Contact Blocks for Side Mounting without Sequence Terminal Designations*</b></p> <ul style="list-style-type: none"> <li>• 1- and 2-pole</li> <li>• Two-way numbering for right or left mounting on the contactor</li> <li>• Quick and easy mounting without tools</li> <li>• Electronic-compatible contacts down to 17V, 10 mA</li> <li>• Mirror contact performance to the main contactor poles</li> <li>• 1L = Late break N.C./early make N.O.</li> </ul>	0	1		 -SA01	100-C all	100-SA01
1		0	 -SA10	100-C all	100-SA10	—	
0		2	 -SA02	100-C all	100-SA02	—	
1		1	 -SA11	100-C all	100-SA11	—	
2		0	 -SA20	100-C all	100-SA20	—	
1L		1L	 -SAL11	100-C all	100-SAL11	—	
 <p><b>Auxiliary Contact Blocks for Side Mounting with Sequence Terminal Designations*</b></p> <ul style="list-style-type: none"> <li>• 1- and 2-pole</li> <li>• Two-way numbering for right or left mounting on the contactor</li> <li>• Quick and easy mounting without tools</li> <li>• Electronic-compatible contacts down to 17V, 10 mA</li> <li>• Mirror contact performance to the main contactor poles</li> <li>• 1L = Late break N.C./early make N.O.</li> </ul>	0	1	 -SB01	100-C	100-SB01	—	
	1	0	 -SB10	100-C*	100-SB10	—	
	0	2	 -SB02	100-C*	100-SB02	—	
	1	1	 -SB11	100-C*	100-SB11	—	
	2	0	 -SB20	100-C*	100-SB20	—	
	1L	1L	 -SBL11	100-C*	100-SBL11	—	

\* Max. number of auxiliary contacts that may be mounted:

AC and 24V DC electronic coil contactors — max. 4 N.O. contacts on the front of the contactor, 2 N.O. contacts on the side, 4 N.C. front or side, 6 total.  
 DC coil contactors — max. 4 N.O. contacts on the front of the contactor or max 2 N.O. contacts on the side, 4 N.C. front or side, 4 total.

\* Double numbering — Left-side mounting only is recommended for **Cat. No. 100-C09...100-C23** due to double numbering.

‡ For screwless terminals (front mount only), insert "CR" after the "100-" in the catalog number. Example: **Cat. No. 100-FA02** becomes **Cat. No. 100-CRFA02**.

