

# Product Details and Certifications

## Cross Reference RA Part Number: 100-SB01 B



**Product: 100-SB01**

Description: Auxiliary Contact Block, Side Mounting, 0 N.O. 1 N.C.  
Left / Right Side



Representative Photo Only (actual product may vary based on configuration sections)

### **ACCESSORY SELECTION**

---

Bulletin Number	100-C Contactor Accessories
Accessory Selection	Individual Accessory Selection



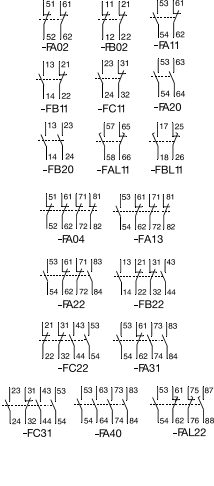

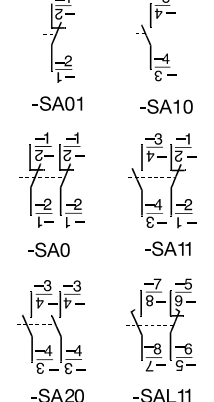

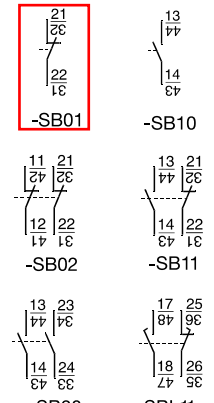
### **APPLICATION DATA**

---

For Use with	Contactors 100-C
--------------	------------------

**Auxiliary Contacts (For 100-C09...C97 contactors)**

2

	Description			Connection Diagrams	For Use With	Standard Auxiliary Contact Cat. No. ‡	Bifurcated Auxiliary Contact Cat. No.		
		N.O.	N.C.						
 <p><b>Auxiliary Contact Blocks for Front Mounting*</b></p> <ul style="list-style-type: none"> <li>• 2- and 4-pole</li> <li>• Quick and easy mounting without tools</li> <li>• Electronic-compatible contacts down to 17V, 5 mA</li> <li>• Mechanically linked performance between N.O. and N.C. poles and to the main contactor poles (except for L types)</li> <li>• Models with equal function with several terminal numbering choices</li> <li>• 1L = Late break N.C./early make N.O.</li> <li>• Bifurcated version for switching down to 5V, 3 mA also available</li> </ul>		0	2		100-C all	<b>100-FA02</b>	<b>100-FAB02</b>		
		1	1		C30⊗00...C97⊗00	<b>100-FB02</b>	100-FBB02		
		2	0		100-C all	<b>100-FA11</b>	<b>100-FAB11</b>		
		1L	1L		C30⊗00...C97⊗00	<b>100-FB11</b>	100-FBB11		
		0	4		C09⊗10...C23⊗10	<b>100-FC11</b>	100-FCB11		
		1	3		100-C all	<b>100-FA20</b>	<b>100-FAB20</b>		
		2	2		C30⊗00...C97⊗00	<b>100-FB20</b>	100-FBB20		
		3	1		100-C all	<b>100-FAL11</b>	—		
		4	0		C30⊗00...C97⊗00	<b>100-FBL11</b>	—		
		1+1L	1+1L		100-C all	<b>100-FA04</b>	<b>100-FAB04</b>		
	 <p><b>Auxiliary Contact Blocks for Side Mounting without Sequence Terminal Designations*</b></p> <ul style="list-style-type: none"> <li>• 1- and 2-pole</li> <li>• Two-way numbering for right or left mounting on the contactor</li> <li>• Quick and easy mounting without tools</li> <li>• Electronic-compatible contacts down to 17V, 10 mA</li> <li>• Mirror contact performance to the main contactor poles</li> <li>• 1L = Late break N.C./early make N.O.</li> </ul>		0		1		100-C all	<b>100-SA01</b>	—
			1		0		100-C all	<b>100-SA10</b>	—
		0	2	100-C all	<b>100-SA02</b>		—		
		1	1	100-C all	<b>100-SA11</b>		—		
		2	0	100-C all	<b>100-SA20</b>		—		
		1L	1L	100-C all	<b>100-SAL11</b>		—		
 <p><b>Auxiliary Contact Blocks for Side Mounting with Sequence Terminal Designations*</b></p> <ul style="list-style-type: none"> <li>• 1- and 2-pole</li> <li>• Two-way numbering for right or left mounting on the contactor</li> <li>• Quick and easy mounting without tools</li> <li>• Electronic-compatible contacts down to 17V, 10 mA</li> <li>• Mirror contact performance to the main contactor poles</li> <li>• 1L = Late break N.C./early make N.O.</li> </ul>		0	1		<b>100-C</b>	<b>100-SB01</b>	←		
		1	0		100-C*	<b>100-SB10</b>	—		
		0	2		100-C*	<b>100-SB02</b>	—		
		1	1		100-C*	<b>100-SB11</b>	—		
		2	0		100-C*	<b>100-SB20</b>	—		
		1L	1L		100-C*	<b>100-SBL11</b>	—		

\* Max. number of auxiliary contacts that may be mounted:  
 AC and 24V DC electronic coil contactors — max. 4 N.O. contacts on the front of the contactor, 2 N.O. contacts on the side, 4 N.C. front or side, 6 total.  
 DC coil contactors — max. 4 N.O. contacts on the front of the contactor or max 2 N.O. contacts on the side, 4 N.C. front or side, 4 total.

⊗ Double numbering — Left-side mounting only is recommended for **Cat. No. 100-C09...100-C23** due to double numbering.

‡ For screwless terminals (front mount only), insert "CR" after the "100-" in the catalog number. Example: **Cat. No. 100-FA02** becomes **Cat. No. 100-CRFA02**.