

# Product Details and Certifications

**Cross Reference RA Part Number: U-00820920037999**

**Product: 20G1AND125AN0NNNNN**

Description: PowerFlex 755 AC Drive, with Embedded Ethernet/IP, Air Cooled, AC Input with Precharge, no DC Terminals, Open Type, 125 Amps, 100HP ND, 75 HP HD, 480V AC, 3 PH, Frame 6, Filtered, CM Jumper Removed, None, Blank (No HIM)




Representative Photo Only (actual product may vary based on configuration sections)

## ***BASE DRIVE INFORMATION***

---

Bulletin Number	PowerFlex 755 AC Drive, with Embedded Ethernet/IP
Input Voltage	480 VAC 60Hz
Phases	3 Phases
Output Current	152 Amps
Normal Duty HP	100 HP
Heavy Duty HP	75 HP
Enclosure	IP20/IP00, NEMA/UL Type Open
Input Type	AC Input with Precharge, no DC Terminals
Frame Size	Frame 6
Filtering & CM Cap Config	Filtered, CM Jumper Removed
Dynamic Braking	None
HIM	Blank (No HIM)

### Catalog Number Explanation

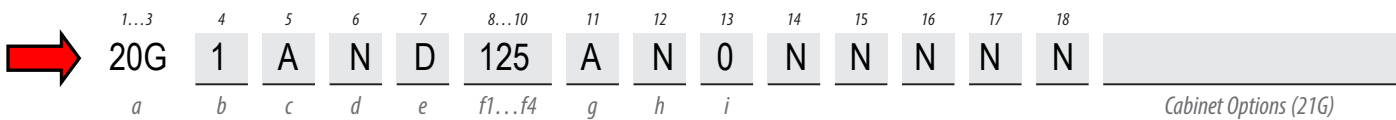

**a**

Drive		
Code	Type	Frames
20F	PowerFlex 753	1...7
<b>20G</b>	<b>PowerFlex 755</b>	<b>1...10</b>
21G	PowerFlex 755 Drive with Options	8...10

**e**

Voltage Rating	
Code	Voltage
C	400V AC/540V DC
<b>D</b>	<b>480V AC/650V DC</b>
E	600V AC/810V DC
F	690V AC/932V DC (not UL listed)

**b**

Future Use		

**c**

Input Type		
Code	Description	Frames
1	AC Input with Precharge, includes DC Terminals	1...4, 8...10
	AC Input without Precharge, includes DC Terminals	5
4	DC Input with Precharge	5...10
<b>A</b>	<b>AC Input with Precharge, no DC Terminals</b>	<b>6...8*</b>

\* The DC Bus Bar kit (20-750-DCBB1-Fx) is available for Frames 6...7 AC input drives requiring DC bus terminals.

**f1**

ND Rating			400V, 50 Hz Input															
Code	Amps	kW	Frame															
			Enclosure Code															
			B, J, L, T	F	G	N	K, P, W, Y	R										
2P1	2.1	0.75																
3P5	3.5	1.5																
5P0	5.0	2.2																
8P7	8.7	4		2	2	2											1	
011	11.5	5.5																
015	15.4	7.5																
022	22	11																
030	30	15																
037	37	18.5		3	3	3												
043	43	22																
060	60	30	-	4	4	4												
072	72	37			5													
085	85	45		5		5												
104	104	55																
140	140	75						6										
170	170	90							6									
205	205	110								6								
260	260	132		§														
302	302	160																
367	367	200			7	7												
456	456	250																
460	460	250																
540	540	315																
567	567	315																
650	650	355			8													
750	750	400																
770	770	400																
910	910	500																
1K0	1040	560																
1K1	1090	630																
1K2	1175	710			9													
1K4	1465	800																
1K5	1480	850																
1K6	1590	900																
2K1	2150	1250		10														

**f2**

ND Rating			480V, 60 Hz Input															
Code	Amps	Hp	Frame															
			Enclosure Code															
			B, J, L, T	F	G	N	K, P, W, Y	R										
2P1	2.1	1																
3P4	3.4	2																
5P0	5.0	3																
8P0	8.0	5																
011	11	7.5																
014	14	10																
022	22	15																
027	27	20																
034	34	25		3	3	3												
040	40	30																
052	52	40	-															-
065	65	50		4	4	4												
077	77	60			5													
096	96	75																
<b>125</b>	<b>125</b>	<b>100</b>																
156	156	125						6										
186	186	150							6									
248	248	200		§														
302	302	250																
361	361	300			7	7												
415	415	350																-
430	430	350																
485	485	400																
545	545	450																
617	617	500			8													8 △
710	710	600																
740	740	650																
800	800	700																
960	960	800																
1K0	1045	900																
1K2	1135	1000			9													9 △
1K3	1365	1100																
1K4	1420	1250																
1K5	1525	1350																
2K0	2070	1750		10														10 △

§ For Frames 6...7 a User Installed Flange Kit is available to convert a Code N drive that provides a NEMA/UL Type 4X/12 back.  
 † Frames 2...5 are IP20, Frames 6...7 are IP00.  
 △ Available as a drive with options (21G).

§ For Frames 6...7 a User Installed Flange Kit is available to convert a Code N drive that provides a NEMA/UL Type 4X/12 back.  
 △ Available as a drive with options (21G).

§ For Frames 6...7 a User Installed Flange Kit is available to convert a Code N drive that provides a NEMA/UL Type 4X/12 back.  
 △ Available as a drive with options (21G).

*f3*

ND Rating		600V, 60 Hz Input		Frame					
Code	Amps	Hp	Enclosure Code						
			B, J, L, T	F	G	N	K, P, W, Y	R	
1P7	1.7	1							
2P7	2.7	2							
3P9	3.9	3							
6P1	6.1	5							
9P0	9	7.5							
011	11	10							
012	12	10							
017	17	15							
018	18	15							
022	22	20							
023	23	20							
024	24	20							
027	27	25							
028	28	25							
032	32	30							
033	33	30							
041	41	40							
042	42	40							
052	52	50							
053	53	50							
063	63	60							
077	77	75							
099	99	100							
125	125	125							
144	144	150							
192	192	200							
242	242	250							
289	289	300							
295	295	300							
355	355	350							
395	395	400							
435	435	450							
460	460	500							
510	510	500							
595	595	600							
630	630	700							
760	760	800							
825	825	900							
900	900	950							
980	980	1000							
1K1	1110	1100							
1K4	1430	1400							

△ Available as a drive with options (21G).

*f4*

ND Rating		690V, 50 Hz Input (not UL listed)		Frame					
Code	Amps	kW	Enclosure Code						
			B, J, L, T	F	G	N	K, P, W, Y	R	
012	12	7.5							
015	15	11							
020	20	15							
023	23	18.5							
030	30	22							
034	34	30							
046	46	37							
050	50	45							
061	61	55							
082	82	75							
098	98	90							
119	119	110							
142	142	132							
171	171	160							
212	212	200							
263	263	250							
265	265	250							
330	330	315							
370	370	355							
415	415	400							
460	460	450							
500	500	500							
590	590	560							
650	650	630							
710	710	710							
765	765	750							
795	795	800							
960	960	900							
1K0	1040	1000							
1K4	1400	1400							

△ Available as a drive with options (21G).

*g*

Filtering and CM Cap Configuration ♦		
Code	Filtering	Default CM Cap Connection
A	Yes	Jumper Removed
J	Yes	Jumper Installed

♦ 480V drives must select code "A." Jumpers are included for field reconfiguration as desired.

*h*

Dynamic Braking &		
Code	Internal Resistor ▲	Internal Transistor ▽
A	No	Yes
N	No	No

▲ Frames 1...2 only.  
 ▽ Standard on Frames 1...5, optional on 6...7.  
 & Not available on Frames 8...10, specify Code "N."

*i*

Door Mounted HIM (Frames 8...10)	
Code	Operator Interface
0	No Door Mounted HIM
2	Enhanced LCD, Full Numeric, IP20
4	Enhanced LCD, Full Numeric, IP66 NEMA Type 4X/12

PowerFlex 755 w/Options (21G) - Required Selections

Code	Option	Frames	Type
LD	Light Duty	8...10	System Overload Duty Cycle *
ND	Normal Duty		
HD	Heavy Duty		
P3	Input Thermal Magnetic Circuit Breaker	8...10	Power Disconnect *
P5	Input Non-Fused Molded Case Disconnect Switch	8 Only	
P14	Wiring Only Bay	8...10	Wiring Only Bay

\* Only one option of this type may be selected.

PowerFlex 755 w/Options (21G) - Additional Selections

Code	Option	Frames	Type
P11	Input Contactor	8 Only	Contactors * §
P12	Output Contactor		
L1	3% Input Reactor	8...9	Reactors *
L2	3% Output Reactor		
L3	5% Input Reactor		
L4	5% Output Reactor		
P20	1200 Amp Bus	8...10	MCC Power Bus Capacity *
P22	2000 Amp Bus		
P24	3000 Amp Bus		
P30	UPS Control Bus, DC Input w/Precharge only	8...10	UPS Control Bus
X1	Auxiliary Transformer (500VA available), IP20 Cabinet Only	8 Only	Auxiliary Power

\* Only one option of this type may be selected.  
 § Contactor options are not available for systems with MCC power bus.