


# Product Details and Certifications

## Cross Reference RA Part Number: PN-54290

 **Product: 800T-FXJE6A1**

Description: 30.5mm Type 4/13 2 Pos. PB-Non-Illum., Jumbo Mushroom Hd (Push-Pull) with E-Stop, Red, 1 NCLB - 1 NO

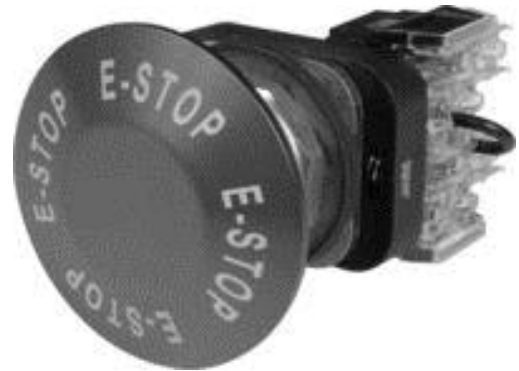

Representative Photo Only (actual product may vary based on configuration selections)

### ***PUSH BUTTON DATA***

E Stop	Yes
Hazardous Location	No
Finger Safe Guards	No Guards
Head Type	Jumbo Mushroom Head (Push-Pull) with "E-Stop"
Cap/Button Color	Red
Block Type	Standard
Contact Blocks	1 N.C.L.B. - 1 N.O.

### ***ASSEMBLY***

Factory or User Assembled?	Factory Assembled
----------------------------	-------------------

### ***CERTIFICATIONS AND APPROVALS***

UL	Listed E14840, E10314; Guide #NKCR, NOIV
CSA	LR1234, LR11924, 22.2 #14
CE	60947-5-1
For UL Certifications Directory:	<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>

### ***RECOMMENDED SPARE PARTS***

800T-N236	LOCKING RING ①
800T-N293	THRUST WASHER
800T-N292	TRIM WASHER
800T-N19	GASKET

① Locking Ring repair parts are for Series N and later devices. For illuminated selector switches, see footnote 2.

② Locking Ring repair parts are for Series U units only. For Series T units, replace the entire device

**2-Position Red Push-Pull and Push-Pull/Twist Release Devices, Non-Illuminated**

**Note:** A jumbo or large legend plate is recommended, if space allows.



2-Position Push-Pull  
 Cat. No. 800T-FX6D4



2-Position Metal Push-Pull  
 Cat. No. 800T-FXLE6D4S



2-Position Push-Pull / Twist  
 Cat. No. 800T-FXT6D4



2-Position Push-Pull / Twist  
 Cat. No. 800H-FRXT6D4


Contact Type	Operator Position		Type 4/13		Type 4/4X/13	
			Push-Pull — 40 mm	Push-Pull — 63 mm Metal	Push-Pull/Twist Release	Push-Pull/Twist Release
	Out	In	Cat. No.	Cat. No.	Cat. No.	Cat. No.
N.C.L.B.*	X	O	<b>800T-FX6D4</b>	<b>800T-FXLE6D4</b>	<b>800T-FXT6D4</b>	<b>800H-FRXT6D4</b>
N.O. - N.C.L.B.*	O	X	<b>800T-FX6A1</b>	<b>800T-FXLE6A1</b>	<b>800T-FXT6A1</b>	<b>800H-FRXT6A1</b>
N.C.L.B. - N.C.L.B.*	X	O	<b>800T-FX6A5</b>	<b>800T-FXLE6A5</b>	<b>800T-FXT6A5</b>	<b>800H-FRXT6A5</b>
S.M.C.B.*‡	X	O	<b>800TC-FX6D4S</b>	<b>800TC-FXLE6D4S</b>	<b>800TC-FXT6D4S</b>	<b>800HC-FRXT6D4S</b>
N.O. - S.M.C.B.*‡	O	X	<b>800TC-FX6A1S</b>	<b>800TC-FXLE6A1S</b>	<b>800TC-FXT6A1S</b>	<b>800HC-FRXT6A1S</b>
S.M.C.B. - S.M.C.B.*‡	X	O	<b>800TC-FX6A5S</b>	<b>800TC-FXLE6A5S</b>	<b>800TC-FXT6A5S</b>	<b>800HC-FRXT6A5S</b>

**Note:** X = Closed/O = Open

**Note:** These caps are only available in plastic.

**Note:** Emergency stop push buttons are compliant with EN ISO 13850 and EN/IEC 60947-5-5 Standards when using N.C.L.B. contact blocks.

‡ The Self Monitoring Contact Block (S.M.C.B.) is composed of a N.C.L.B. contact wired in series with a N.O. monitoring contact. The N.O. monitoring contact automatically closes when the S.M.C.B. is properly installed onto the E-stop operator. If the S.M.C.B. is separated from the E-stop operator, the N.O. monitoring contact will automatically open.



**800 T - FXJE 6 A1**

a

b

c

d

e

e (cont'd)

Protection Rating	
Code	Description
<b>T</b>	<b>Metal, Type 4/13</b>
H	Plastic, Type 4/4X/13

Finger-Safe Guards	
Code	Description
<b>Blank</b>	<b>No guards</b>
C	Guards on terminals

Head Type‡		
800T Type 4/13	Description	800H Type 4/4X/13
Code		Code
FX	Mushroom head (push-pull)	—
FXC	90 mm anodized aluminum head (push-pull)	—
FXJ	Jumbo mushroom head (push-pull)	—
<b>FXJE</b>	<b>Jumbo mushroom head (push-pull) with "E-Stop"</b>	—
FXL	63 mm anodized aluminum head (push-pull)	—
FXLE	63 mm anodized aluminum head (push-pull) with "E-Stop"	—
FXT	Push-pull/twist-to-release	FRXT
FXJT	Jumbo head push-pull with twist-to-release	FRXJT

Color Cap	
Code	Color
Blank	No cap§
1	Green
2	Black
3	Orange
4	Grey
5	White
<b>6</b>	<b>Red</b>
7	Blue
9	Yellow

Contact Block(s)			
Code	Operator Position		Description
Blank	—	—	No contacts on operator
Standard			
D1	O	X	1 N.O.
D2	X	O	1 N.C.
D4	X	O	1 N.C.L.B.
A	O	X	1 N.O. - 1 N.C.
<b>A1</b>	<b>O</b>	<b>X</b>	<b>1 N.O. - 1 N.C.L.B.</b>
A5	X	O	2 N.C.L.B.

Contact Block(s)			
Code	Operator Position		Description
Blank	—	—	No contacts
PenTUFF (Low Voltage)			
D1V	O	X	1 N.O.
D2V	X	O	1 N.C.
D4V	X	O	1 N.C.L.B.
AV	O	X	1 N.O. - 1 N.C.
X	X	O	
Class 1, Div. 2/Zone 2			
Logic Reed			
D1R	O	X	1 N.O.
D2R	X	O	1 N.C.
AR	O	X	1 N.O. - 1 N.C.
X	X	O	
Sealed Switch			
D1P	O	X	1 N.O.
D2P	X	O	1 N.C.
AP	O	X	1 N.O.
X	X	O	1 N.C.
Stackable Sealed Switch			
D1Y	O	X	1 N.O.
D2Y	X	O	1 N.C.
AY	O	X	1 N.O. - 1 N.C.
X	X	O	

**Note:** X = Closed/O = Open

\* Normally closed late break contact. When button is pushed from the OUT to IN position, the mechanical detent action of the operator occurs before electrical contacts change state. When the button is pulled from the IN in the OUT position, the electrical contacts change state before the mechanical detent occurs.

‡ Devices with N.C.L.B. contacts meet EN ISO 13850 and IEC 60947-5-5 standards for emergency stop applications.

§ Not valid with head Type J or JT.