

Product Details and Certifications

Cross Reference RA Part Number: 1321-3R100-C A

 **Product: 1321-3R100-C**

Description: Three-Phase Line Reactor, Open Style (AC Drive Reactors),
100 Amps, 0.45 mh



Representative Photo Only (actual product may vary based on configuration sections)

REACTOR DATA

| | |
|------------------|---|
| Bulletin Number | 1321- Line Reactor |
| Fundamental Amps | 100 Amps |
| Phases | 3 PH |
| Inductance | 0.45 mH |
| Impedance | 3% or 5% Based on Fundamental Current Ratings |
| Enclosure Type | Open Type |

CERTIFICATIONS AND APPROVALS

UL
CSA
CE

1321 Power Conditioning Products

Don't Ignore the Cost of Power Line Disturbance



| Topic | Page |
|--|--------------------|
| Product Overview | 2 |
| 1321-3R and 3RA Series Line Reactors | 3 |
| 1321 Reflective Wave Reduction (RWR) Devices | 12 |
| 1321-3TH/3TW Series Three-Phase Isolation Transformers | 16 |
| 1321-M Common Mode Chokes | 21 |
| 1321-DC DC Link Chokes | 24 |

LISTEN.
THINK.
SOLVE.

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation.

| Resource | Description |
|---|--|
| Wiring and Grounding Guidelines for Pulse Width Modulated (PWM) AC Drives, publication DRIVES-IN001 | Provides basic information needed to properly wire and ground PWM AC drives. |
| Safety Guidelines for the Application, Installation and Maintenance of Solid State Control, publication SGI-1.1 | Provides general guidelines for the application, installation, and maintenance of solid-state control. |

You can view or download publications at <http://www.rockwellautomation.com/literature/>. To order paper copies of technical documentation, contact your local Allen-Bradley distributor or Rockwell Automation sales representative.

For Allen-Bradley Drives Technical Support:

| Title | Online at... |
|--|---|
| Allen-Bradley Drives Technical Support | www.ab.com/support/abdrives or call (1) 262.512.8176 |

Product Overview

Allen-Bradley reactors help keep equipment running longer by absorbing many of the power line disturbances which can shut down your drive. Allen-Bradley isolation transformers can provide both voltage change and isolation for your variable speed drive. These designs are harmonic compensated and IGBT protected to assure optimum performance in the presence of harmonics.




1321-3R and 3RA Series Line Reactors

Applying Allen-Bradley Line Reactors

At the Input of the Drive

At the input of a drive, line reactors help protect against surges or spikes on the incoming power lines and help reduce harmonic distortion.


- Eliminate Nuisance Tripping
- Improve True Power Factor
- Extend Semiconductor Life
- Reduce Voltage Notching
- Reduce Harmonic Distortion
- Meet IEEE-519 or EN-61800

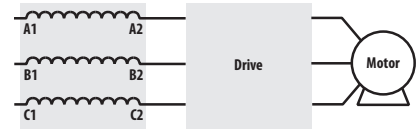

At the Output of the Drive


In long motor lead applications, Allen-Bradley load reactors located between the drive and motor help reduce dv/dt and motor terminal peak voltages. The use of a load reactor also helps protect the drive from surge currents caused by rapid changes in the load.

- Protect Motors from Long Lead Effects
- Reduce Surge Currents
- Reduce Output Voltage dv/dt
- Reduce Motor Temperature
- Extend Semiconductor Life
- Reduce Audible Motor Noise

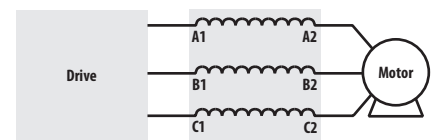


With Multiple Drives

Multiple drives on a common power line should each have their own line reactor. Individual line reactors provide filtering between each drive to help reduce any crosstalk while providing optimum surge protection for each drive.

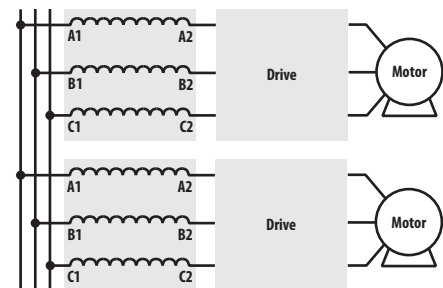


With Multiple Motors

When more than one motor is controlled by a single drive, a single line reactor can typically be used between the drive and all the motors. Size the line reactor based on the total motor/load horsepower.

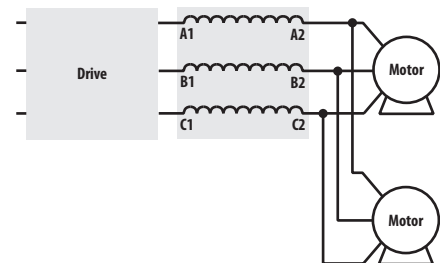

With Single-Phase Input

A three-phase reactor can be used for single-phase applications by routing each of the two input power conductors to the outside two coils, and leaving the center coil disconnected. The sum of the inductance of the two coils is the total inductance applied to the circuit. Contact Rockwell Automation Technical Support for assistance in specifying the proper reactor.

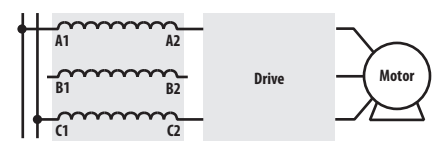

Selecting the Correct Impedance Rating

Why is the Right Impedance Rating Important?

Selecting the correct impedance rating is critical for your job. An impedance value too low may not limit peak current. Too high of an impedance may reduce input voltage. Allen-Bradley line reactors offer two impedance ratings.

3% Impedance Rated Reactors to Reduce Nuisance Trips

Allen-Bradley line reactors rated at 3% are typically sufficient to absorb line spikes and motor current surges and will help prevent nuisance tripping of drive and circuit breakers in most applications.


5% Impedance Rated Reactors to Reduce Harmonic Content

Allen-Bradley reactors rated at 5% are best for reducing harmonic current and frequencies. These line reactors help comply with IEEE-519 (not normally used as load reactors).

Voltage Spike Protection

Voltage spikes on AC power lines can cause elevation of the DC bus voltage which may cause the drive to trip on an overvoltage condition.


3% impedance reactors are very effective at protecting drives against voltage spikes and nuisance tripping. Allen-Bradley line reactors absorb these line spikes protecting the drive from nuisance tripping and damage.

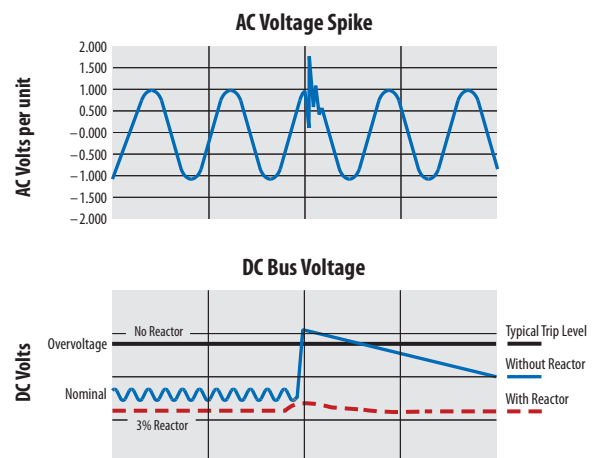


Motor Protection

Allen-Bradley load reactors can help protect motors from high peak voltages.

For IGBT drive applications with long drive-to-motor lead lengths, Allen-Bradley load reactors can help protect against fast dv/dt rise times.

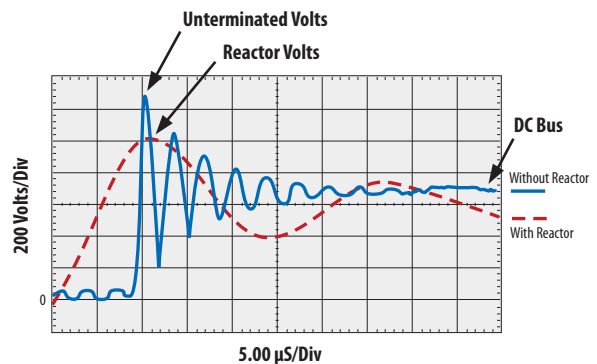

Catalog Number Explanation

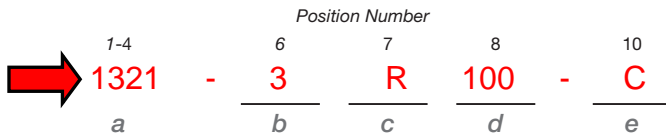

a

| Product | |
|---------|----------------------|
| Code | Type |
| 1321 | 1321 Power Component |

b

| Phases | |
|--------|-------------|
| Code | Description |
| 3 | Three-Phase |

c

| Device | |
|--------|---------------------------------------|
| Code | Description |
| R | Reactor, Open |
| RA, RB | Reactor, NEMA 1 |
| RAB | Reactor, NEMA 1, Cabinet Style 2 Only |

d

| Fundamental Amps | |
|------------------|------|
| Code | Amps |
| 1 | 1 |
| 2 | 2 |
| 4 | 4 |
| 8 | 8 |
| 12 | 12 |
| 18 | 18 |
| 25 | 25 |
| 35 | 35 |
| 45 | 45 |
| 55 | 55 |
| 80 | 80 |
| 100 | 100 |
| 130 | 130 |
| 160 | 160 |
| 200 | 200 |
| 250 | 250 |
| 320 | 320 |
| 400 | 400 |
| 500 | 500 |
| 600 | 600 |
| 750 | 750 |
| 850 | 850 |
| 1000 | 1000 |

e

| Inductance Rating | |
|-------------------|---|
| Code | Description |
| A | Each reactor current rating has four inductance ratings also available. See the IP00 dimension table. |
| B | |
| C | |
| D | |



Common Specifications

| Specification | | Rating |
|--|--|---|
| Material | Enclosures | IP11 (NEMA/UL Type 1) — Sheet steel in accordance with UL, NEMA requirements |
| | | IP00 (Open) or IP20 (Open - with finger safe terminals) |
| | Terminations | 1-45 Amp (fundamental) Ratings – Finger guard IP20 terminal block |
| | | 80-160 Amp (fundamental) Ratings – Solid copper box lugs |
| 200-400 Amp (fundamental) Ratings – Copper tab terminals | | |
| | | 401 Amps and Above – Copper tab terminals |
| Harmonic Compensation | All line reactors are compensated for the additional currents and high frequencies caused by the presence of harmonics | |
| General Protection | Impedance | 3% or 5% based on the fundamental current ratings |
| | Overload Rating | 200% of fundamental current for 30 minutes 300% of fundamental current for 1 minute |
| | dv/dt Protection | Meets NEMA MG-1, part 31 |
| Electrical | Max. Rated Voltage | 600V AC (units with terminal blocks) 690V AC (units with box lugs or tab terminals) |
| | Max. Switching Freq. | 20 kHz |
| | Fundamental Frequency | Line/Load - 50/60 Hz |
| | Temperature Rise | 135 degrees C average |
| | Dielectric Strength | 3,000 Volts rms (4,243 volts peak) |
| | Inductance Curve (Typical) | 100% at 100% current 100% at 150% current 50% at 350% current (minimum) |
| | Inductance Tolerance | ±10% |
| | Insulation System | Class N (200 degrees C) |
| | Impregnation | High bond strength solventless epoxy, 200 degrees C, UL94HB recognized |
| Environmental | Ambient Temperature | 45 degrees C (maximum) |
| | Altitude | 1000 meters (3280 feet) |
| Agency Approvals | UL-508 | File E180243 Component Listed (1-2400 amps) File E180243 UL Listed NEMA Type 1 units (1-2400 amps) Note: Short Circuit rating not required under Exception No.1 of UL508A SB4.2.1 effective 4/25/06 |
| | CSA C22.2, Class N, 200 °C | File LR29753-13 CSA Certified (1 amp - 2400 amps) File E66214, Type 200-18, UL Recognized Insulation System |
| | CE | TUV certified to EN61558-2-20:2000 |


Termination

Allen-Bradley reactors rated 45 Amps (fundamental) and below are supplied with an integral mounted terminal block. Reactors rated from 55 to 160 Amps (fundamental) are supplied with box lugs. Reactors rated 200 to 400 Amps (fundamental) will be supplied with front facing copper tabs. Above 400 Amps (fundamental), side facing copper tabs are used. The “3R” and “3RA” designations for the 1321 line reactors indicate the following: 3R = Open Enclosure Line Reactor and 3RA = NEMA 1 Enclosure Line Reactor.

Typical Termination Types and Specifications

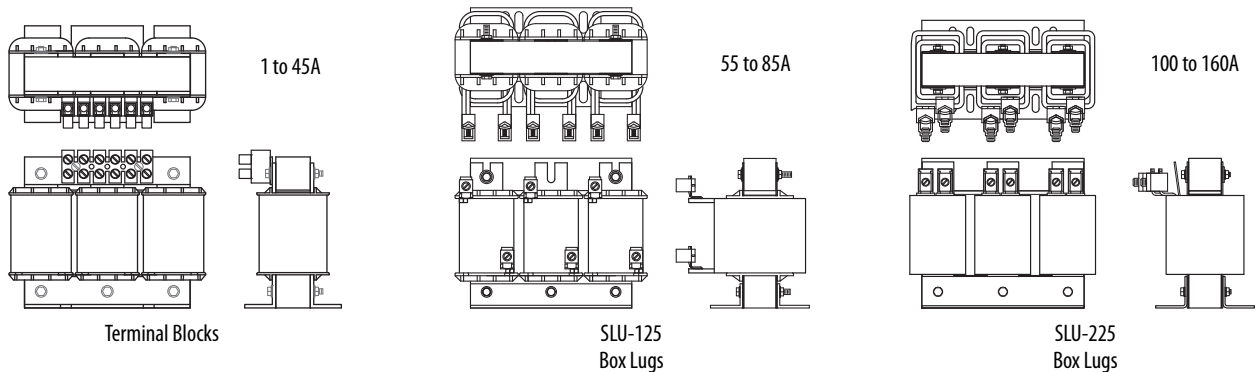

| Reactor Catalog Number | Termination | Max./Min. Wire Size | Max. Torque |
|------------------------------|--------------------------------|---------------------|-----------------------|
| IP00 (Open) or IP20 | IP11 (NEMA/UL Type 1) | Type | mm ² (AWG) |
| 1321-3R1-A to 1321-3R8-D | 1321-3RA1-A to 1321-3RA8-D | 20A Terminal Block | 2.1/0.3 (14/22) |
| 1321-3R12-A to 1321-3R35-B | 1321-3RA12-A to 1321-3RA35-B | 65A Terminal Block | 16.0/0.3 (5/22) |
| 1321-3R35-C to 1321-3R45-C | 1321-3RA35-C to 1321-3RA45-C | 85A Terminal Block | 21.2/0.8 (4/18) |
| 1321-3R55-A to 1321-3R80-C | 1321-3RA55-A to 1321-3RA80-C | SLU-125 Box Lug | 50.0/10.0 (0/6) |
| 1321-3R100-A to 1321-3R160-C | 1321-3RA100-A to 1321-3RA160-C | SLU-225 Box Lug | 120.0-27.0 (0000/2) |

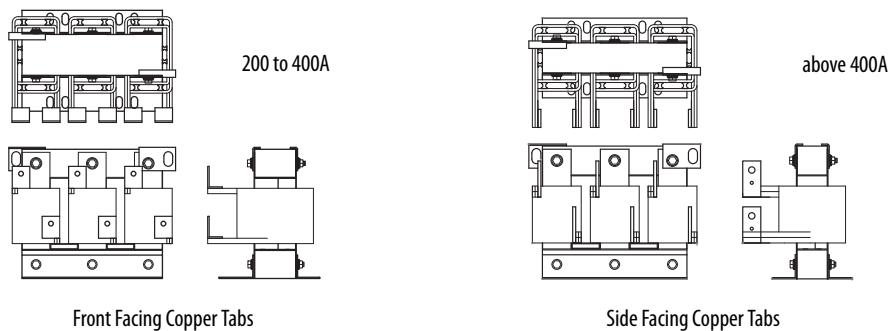

| Reactor Catalog Number | Termination | Contact Surface (H x W) | Hole Diameter | Thickness |
|-------------------------------|----------------------------------|-------------------------|---------------------------|-----------------------------|
| IP00 (Open) or IP20 | IP11 (NEMA/UL Type 1) | Type | mm (in.) | mm (in.) |
| 1321-3R200-A to 1321-3R200-C | 1321-3RA200-A to 1321-3RA200-C | Front Facing Copper Tab | 41.3 x 25.4 (1.63 x 1.0) | 10.36 (0.408) |
| 1321-3R250-B to 1321-3RB250-C | 1321-3RAB250-A to 1321-3RAB250-C | Front Facing Copper Tab | 57.2 x 19.1 (2.25 x 0.75) | 10.31 (0.406) |
| 1321-3RB320-A to 1321-3R400-A | 1321-3RAB320-A to 1321-3RA400-A | Front Facing Copper Tab | 44.5 x 38.1 (1.75 x 1.5) | 10.31 (0.406) |
| 1321-3R500-A | 1321-3RA500-A | Side Facing Copper Tab | 44.5 x 38.1 (1.75 x 1.5) | 10.31 (0.406) |
| 1321-3R500-B to 1321-3R500-C | — | Front Facing Copper Tab | 76.2 x 38.1 (3.00 x 1.5) | 13.49 & 6.35 (0.531 & 0.25) |
| — | 1321-3RA500-B | Side Facing Copper Tab | 44.5 x 38.1 (1.75 x 1.5) | 10.31 (0.406) |

| Catalog Number | Fundamental Amps | Inductance - mH (Based on Fundamental Amps) | Watts Loss | Dimensions in mm (in.) and Weight in kg (lbs.) | | | | | |
|------------------------------|------------------|--|------------|--|-------------|-------------|------------------|------------|-------------|
| | | | | A | B | C | D ⁽¹⁾ | E | Weight |
| 1321-3R45-A | 45 | 0.3 | 54 | 229 (9.00) | 188 (7.40) | 119 (4.70) | 80 (3.16) | 76 (3.00) | 10.0 (22) |
| 1321-3R45-B | | 0.7 | 62 | 229 (9.00) | 188 (7.40) | 119 (4.70) | 80 (3.16) | 76 (3.00) | 13.0 (28) |
| 1321-3R45-C | | 1.2 | 65 | 229 (9.00) | 185 (7.30) | 135 (5.30) | 93 (3.66) | 76 (3.00) | 18.0 (39) |
| 1321-3R55-A | 55 | 0.25 | 64 | 229 (9.00) | 185 (7.30) | 135 (5.30) | 80 (3.16) | 76 (3.00) | 11.0 (24) |
| 1321-3R55-B | | 0.5 | 67 | 229 (9.00) | 178 (7.00) | 135 (5.30) | 80 (3.16) | 76 (3.00) | 12.0 (26) |
| 1321-3R55-C | | 0.85 | 71 | 229 (9.00) | 178 (7.00) | 152 (6.00) | 99 (3.91) | 76 (3.00) | 16.0 (35) |
| 1321-3R80-A | 80 | 0.2 | 82 | 229 (9.00) | 183 (7.20) | 160 (6.30) | 88 (3.47) | 92 (3.63) | 11.3 (25) |
| 1321-3R80-B | | 0.4 | 86 | 229 (9.00) | 183 (7.20) | 165 (6.50) | 88 (3.47) | 92 (3.63) | 14.9 (33) |
| 1321-3R80-C | | 0.7 | 96 | 274 (10.80) | 216 (8.50) | 173 (6.80) | 106 (4.16) | 92 (3.63) | 28.0 (61) |
| 1321-3R100-A | 100 | 0.15 | 94 | 229 (9.00) | 185 (7.30) | 165 (6.50) | 84 (3.30) | 92 (3.63) | 13.1 (29) |
| 1321-3R100-B | | 0.3 | 84 | 229 (9.00) | 185 (7.30) | 173 (6.80) | 93 (3.66) | 92 (3.63) | 16.8 (37) |
| 1321-3R100-C | | 0.45 | 108 | 274 (10.80) | 210 (8.30) | 156 (6.20) | 106 (4.16) | 92 (3.63) | 34.0 (74) |
| 1321-3R130-A | 130 | 0.1 | 108 | 229 (9.00) | 178 (7.00) | 118 (4.70) | 80 (3.16) | 76 (3.00) | 13.1 (29) |
| 1321-3R130-B | | 0.2 | 180 | 229 (9.00) | 183 (7.20) | 173 (6.80) | 93 (3.66) | 92 (3.63) | 19.5 (43) |
| 1321-3R130-C | | 0.3 | 128 | 279 (11.00) | 216 (8.50) | 156 (6.20) | 106 (4.16) | 92 (3.63) | 29.0 (64) |
| 1321-3R160-A | 160 | 0.075 | 116 | 229 (9.00) | 183 (7.20) | 173 (6.80) | 80 (3.16) | 92 (3.63) | 18.6 (41) |
| 1321-3R160-B | | 0.15 | 149 | 274 (10.80) | 211 (8.30) | 152 (6.00) | 88 (3.47) | 92 (3.63) | 23.0 (50) |
| 1321-3R160-C | | 0.23 | 138 | 292 (11.50) | 216 (8.50) | 229 (9.00) | 119 (4.69) | 92 (3.63) | 30.0 (67) |
| 1321-3R200-A | 200 | 0.055 | 124 | 229 (9.00) | 191 (7.50) | 185 (7.30) | 106 (4.16) | 76 (3.00) | 17.2 (38) |
| 1321-3R200-B ⁽¹⁾ | | 0.110 | 168 | 229 (9.00) | 191 (7.50) | 211 (8.30) | 112 (4.41) | 76 (3.00) | 24.5 (54) |
| 1321-3R200-C ⁽¹⁾ | | 0.185 | 146 | 274 (10.80) | 211 (8.30) | 254 (10.00) | 150 (5.91) | 92 (3.63) | 45.4 (100) |
| 1321-3R250-A ⁽¹⁾ | 250 | 0.045 | 154 | 229 (9.00) | 191 (7.50) | 229 (9.00) | 106 (4.19) | 76 (3.00) | 21.3 (47) |
| 1321-3R250-B ⁽¹⁾ | | 0.090 | 231 | 274 (10.80) | 216 (8.50) | 229 (9.00) | 131 (5.16) | 117 (4.60) | 36.3 (80) |
| 1321-3R250-C ⁽¹⁾ | | 0.150 | 219 | 366 (14.40) | 284 (11.20) | 262 (10.30) | 148 (5.82) | 117 (4.60) | 57.0 (125) |
| 1321-3R320-A ⁽¹⁾ | 320 | 0.040 | 224 | 274 (10.80) | 229 (9.00) | 211 (8.30) | 131 (5.16) | 117 (4.60) | 36.3 (80) |
| 1321-3R320-B ⁽¹⁾ | | 0.075 | 264 | 274 (10.80) | 229 (9.00) | 254 (10.00) | 149 (5.88) | 117 (4.60) | 46.3 (102) |
| 1321-3R320-C ⁽¹⁾ | | 0.125 | 351 | 366 (14.40) | 286 (11.30) | 267 (10.50) | 181 (7.13) | 117 (4.60) | 72.6 (160) |
| 1321-3R400-A ⁽¹⁾ | 400 | 0.030 | 231 | 274 (10.80) | 254 (10.00) | 254 (10.00) | 131 (5.16) | 117 (4.60) | 38.1 (84) |
| 1321-3R400-B ⁽¹⁾ | | 0.060 | 333 | 381 (15.00) | 286 (11.30) | 292 (11.50) | 172 (6.76) | 117 (4.60) | 53.5 (118) |
| 1321-3R400-C ⁽¹⁾ | | 0.105 | 293 | 366 (14.40) | 286 (11.30) | 318 (12.50) | 184 (7.26) | 117 (4.60) | 67.6 (149) |
| 1321-3R500-A ⁽¹⁾ | 500 | 0.025 | 266 | 274 (10.80) | 229 (9.00) | 267 (10.50) | 140 (5.50) | 117 (4.60) | 42.2 (93) |
| 1321-3R500-B ⁽¹⁾ | | 0.050 | 340 | 366 (14.40) | 292 (11.50) | 292 (11.50) | 172 (6.76) | 117 (4.60) | 53.5 (118) |
| 1321-3R500-C ⁽¹⁾ | | 0.085 | 422 | 366 (14.40) | 292 (11.50) | 338 (13.30) | 248 (9.76) | 117 (4.60) | 95.3 (210) |
| 1321-3R600-A ⁽¹⁾ | 600 | 0.020 | 307 | 366 (14.40) | 292 (11.50) | 254 (10.00) | 134 (5.26) | 117 (4.60) | 54.4 (120) |
| 1321-3R600-B ⁽¹⁾ | | 0.040 | 414 | 366 (14.40) | 286 (11.30) | 305 (12.00) | 203 (8.00) | 117 (4.60) | 79.4 (175) |
| 1321-3R600-C ⁽¹⁾ | | 0.065 | 406 | 366 (14.40) | 286 (11.30) | 381 (15.00) | 235 (9.26) | 117 (4.60) | 122.5 (270) |
| 1321-3R750-A ⁽¹⁾ | 750 | 0.015 | 427 | 366 (14.40) | 292 (11.50) | 279 (11.00) | 168 (6.63) | 183 (7.20) | 63.5 (140) |
| 1321-3R750-B ⁽¹⁾ | | 0.029 | 630 | 366 (14.40) | 292 (11.50) | 318 (12.50) | 204 (8.01) | 183 (7.20) | 86.2 (190) |
| 1321-3R750-C ⁽¹⁾ | | 0.048 | 552 | 366 (14.40) | 368 (14.50) | 356 (14.00) | 235 (9.26) | 183 (7.20) | 120.2 (265) |
| 1321-3R750-E ⁽¹⁾ | | 0.060 | 810 | 366 (14.40) | 368 (14.50) | 381 (15.00) | 276 (10.88) | 183 (7.20) | 147.4 (325) |
| 1321-3R850-A ⁽¹⁾ | 850 | 0.015 | 799 | 451 (17.80) | 394 (15.50) | 368 (14.50) | 191 (7.50) | 183 (7.20) | 88.0 (195) |
| 1321-3R850-B ⁽¹⁾ | | 0.027 | 756 | 451 (17.80) | 394 (15.50) | 394 (15.50) | 208 (8.20) | 183 (7.20) | 98.0 (215) |
| 1321-3R850-C ⁽¹⁾ | | 0.042 | 758 | 451 (17.80) | 400 (15.80) | 445 (17.50) | 208 (8.20) | 183 (7.20) | 143.0 (315) |
| 1321-3R1000-B ⁽¹⁾ | 1000 | 0.022 | 964 | 514 (20.25) | 425 (16.80) | 330 (13.00) | 216 (8.50) | 183 (7.20) | 185.0 (408) |
| 1321-3R1000-C ⁽¹⁾ | | 0.038 | 960 | 514 (20.25) | 425 (16.80) | 381 (15.00) | 273 (10.76) | 183 (7.20) | 267.2 (589) |

(1) Removable lifting rings are supplied with the unit.