

# Product Details and Certifications

## Cross Reference RA Part Number: 1606-XLRED40 A

 **Product: 1606-XLRED40**

Description: Single Redundancy Module, Vin 1 -.6Vin, 960 W,  
24V DC Input Voltage



Representative Photo Only (actual product may vary based on configuration sections)

### **POWER SUPPLY DATA**

---

Bulletin Number	1606 Switched Mode Power Supplies
Input Voltage	24V DC, 35V Max.
Output Voltage	Vin -.6V Typ.
Rated Output Watts	960 W
Operational Range	18...36V DC
Rated Input Current	0...40 A (50 A Max)
Special Features	Single Redundancy Mode for 2.5-50A; N+1 Redundancy
Rated Output Current	0...40 A (50 A Max)

### **CERTIFICATIONS AND APPROVALS**

---

UL  
CE  
IEC/EN  
EMC

For UL Certifications Directory:

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Bulletin	1606-XLP	1606-XL	1606-XLS	1609	1497
Type	Switched Mode Power Supply Single Phase	Switched Mode Power Supply Single/Three Phase	Switched Mode Power Supply Single/Three Phase	Uninterruptible Power Supply	Control Circuit Transformer
Features	<ul style="list-style-type: none"> <li>Low inrush current</li> <li>Wide range input; auto select input</li> <li>Superior overload design (continuous current, no hiccup)</li> <li>NEC Class 2 "Limited Power"</li> <li>Superior efficiency and temperature rating</li> </ul>	<ul style="list-style-type: none"> <li>Low inrush current</li> <li>PFC Choke</li> <li>Wide range input; auto select input</li> <li>Superior overload design (continuous current, no hiccup)</li> <li>NEC Class 2 "Limited Power"</li> <li>Selectable operating mode (single/parallel)</li> <li>Superior efficiency and temperature rating</li> <li>Output signals</li> </ul>	<ul style="list-style-type: none"> <li>Ultra-small size</li> <li>Extra-low inrush current</li> <li>Active Power Factor Correction</li> <li>Wide range AC/DC input; auto select input</li> <li>Superior reserve power (can support 150% rated power for 3..5 seconds)</li> <li>Superior efficiency and temperature rating</li> <li>DC OK and Overload LED</li> </ul>	<ul style="list-style-type: none"> <li>Rugged industrial design</li> <li>DIN Rail or Back of Panel mountable</li> <li>Elevated temperature performance (up to 50°C)</li> <li>Comprehensive network management</li> <li>Remote monitoring/configuration</li> <li>"Dry contact" I/O</li> <li>Line interactive</li> <li>Pure sine wave output</li> </ul>	<ul style="list-style-type: none"> <li>Wide VA range</li> <li>Enclosed construction 63...350 VA</li> <li>Terminal covers finger safe</li> <li>Optional fuse covers available</li> <li>Dual primary and secondary fuse block available to 500 VA</li> <li>Class B insulation (130°C)</li> <li>All welded construction</li> </ul>
Output Power (Watts/VA)	25...100 W	60...960 W	80...480 W	325 W/500 VA	63..2000 VA
Input Voltage / Primary Voltage	85...264V AC 85...375V DC	85...132/176...264/340...576V AC 160...375/450...820V DC	85...276/323...552V AC 88...375/450...780V DC	120, 208/230V AC	208...600V
Efficiency	80...90%	87...93%	91.6...95%	96%	—
Output Voltage / Secondary Voltage	5, 10...12, 15, 24, 48V DC	24, 36, 48V DC	24V DC	120, 208/230V AC	24...120V Multi-tap 115...230V (50 Hz)
Rated Output Current	1.3...4.2 A	2.5...40 A	3.4...20 A	4.2 A	—
Operating Temperature Range (Tamb)	-10...+70°C >60°C with derating	-10...+70°C >60°C with derating	-25...+70°C >60°C with derating	0...50°C	—
Non-Operating Temperature Range	-40...+85°C			-20...+60°C	—
Insulation	—	—	—	—	Class B 130°C
Certifications	cULs, CE	cULs, CE	cULs, CE	UL, CSA, CE	cULs, CE
Standards	EN 50081-1, EN 61000-6-2, EN 61000-3-2 (A14) UL 508 UL 1950	EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, EN 61000-3-2 (A14), EN 50081-1 UL 508 UL 1950	EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, EN 61000-3-2 (A14), EN 50081-1 UL 508 UL 1950	EN 50091-1-1, EN 50091-2 (Class 2) UL 1778	EN 60529
Special Application Products	<ul style="list-style-type: none"> <li>Compact Redundancy Module for 10...60V DC</li> <li>50 W Device with Removable Terminal Blocks</li> <li>Buffer Module for Extended Ride-Through</li> <li>Redundant Power Supplies</li> <li>Redundancy Modules</li> </ul>				
Product Selection	Page 11	Page 11	Page 11	Page 23	Page 27

# Switched Mode Power Supplies

## Product Overview/Product Sizing



### Bulletin 1606 — Power Supplies ❄️

- Quick mounting and connecting, innovative DIN-Rail mount, smallest in class
- Low inrush current limiting
- PFC Active or Passive
- Wide range input; auto select input
- Superior overload design (continuous current, no hiccup)
- NEC Class 2 'Limited Power' options
- Selectable operating mode (single/parallel)
- Superior efficiency and temperature rating

### Special Modules

- Brownout buffer, DC to DC converter, N+1 redundancy

### Standards Compliance

- World-wide Certifications‡
- NEC Class 2
- Class 1 Div. 2 (T3A)
- cULus, CE, C-Tick
- SEMI F47 Compatible
- ABS/GL/RINA (Marine)

### Table of Contents

Product Sizing..... this page

Quick Guide..... page 9

Special Applications ..... page 9

Cat. No. Explanation ..... page 10

Product Selection ..... page 11

Accessories..... page 11

Specifications..... page 12

Special Modules..... page 17

Approximate Dimensions..... page 18

1606-XL Redundancy Capabilities..... page 20

1606-XLBuffer ..... page 21

### Certifications



\* Not all features apply to all power supplies; see individual power supply descriptions for specifics

❄️ A more detailed list of performance specifications can be found at the Allen-Bradley web site

[http://www.ab.com/industrialcontrols/products/power\\_supplies/index.html](http://www.ab.com/industrialcontrols/products/power_supplies/index.html)

‡ Dual UL rating with cURus 60950 relating to certified use in information technology.

### How to Select a Bulletin 1606 Power Supply

The Bulletin 1606 line of Power Supplies is designed with "reserve power" thereby eliminating the need to oversize your power supply to start high inrush loads.

#### Steps to size a Power Supply

1. Determine the "Average" continuous current of the load and the typical inrush current.
2. Select a power supply where the rated load is at/or below the current of the device and the Peak Current is less than the short-circuit rating of the power supply.


#### Notes:

- PowerBoost will deliver up to 25% additional current continuously at 40 deg C or less.
- ReservePower will deliver 150% of rated current for up to 4 sec.

#### Example:

**Application:** Single Phase 120V input, 24V output, 6 A continuous current @ 35 °C, with 9 A inrush current **Solution:** 1606-XL120D

#### Output Characteristic for XL120D (5 A) Power Supply

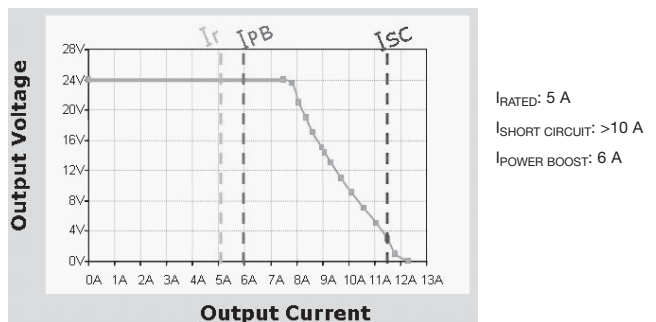

Cat. No.	I <sub>RATED</sub>	I <sub>SHORT CIRCUIT (25°C)</sub>	I <sub>POWER BOOST OF I<sub>RESERVEPOWER</sub></sub>
1606-XLS80E	3.4 A	5.2 A	5.4 A§
1606-XLS120E	5.0 A	9.0 A	7.5 A§
1606-XLS240E	10 A	21 A	15 A§
1606-XLS480E-3	20 A	29 A	30 A§
1606-XLSDNET4	3.8 A	4.0 A	—
1606-XLSDNET8	8.0 A	7.0 A	—
1606-XLP25A	5.0 A	5.0 A	—
1606-XLP30B	3.0 A	4.0 A	—
1606-XLP30E	1.3 A	1.9 A	—
1606-XLP36C	2.8 A	2.0 A	—
1606-XLP50B	4.2 A	4.3 A	—
1606-XLP50E	2.1 A	3.1 A	—
1606-XLP50EZ	2.1 A	3.1 A	—
1606-XLP50F	1.0 A	1.7 A	—
1606-XLP72E	3.0 A	4.5 A	—
1606-XLP90B	8.0 A	8.0 A	—
1606-XLP95E	3.9 A	7.0 A	—
1606-XLP100E	4.2 A	7.1 A	—
1606-XLP100F	2.1 A	3.6 A	—
1606-XL60D	2.5 A	4.5 A*	—
1606-XL120D	5.0 A	10 A*	6.0 A
1606-XL180B	15 A	21 A*	—

Cat. No.	I <sub>RATED</sub>	I <sub>SHORT CIRCUIT (25°C)</sub>	I <sub>POWER BOOST OF I<sub>RESERVEPOWER</sub></sub>
1606-XL240E	10 A	18 A*	12 A
1606-XL240EP	10 A	18 A*	12 A
1606-XL240FP	5.0 A	10 A*	6.0 A
1606-XL480E	20 A	N/A>	25 A
1606-XL480EP	20 A	22 A	25 A
1606-XL480EPT	20 A	22 A	25 A
1606-XL480GP	13.3 A	12 A	16.6 A
1606-XL480F	10 A	24 A	12.5 A
1606-XL120E-3	5.0 A	11 A*	6.0 A
1606-XL240E-3	10 A	22 A*	12 A
1606-XL480E-3	20 A	N/A>	25 A
1606-XL480E-3W	20 A	25 A	25 A
1606-XL480F-3H	10 A	N/A>	12.5 A
1606-XL720E-3	30 A	N/A>	33 A
1606-XL960E-3	40 A	44 A	45 A
1606-XL960E-3S	40 A	44 A	45 A
1606-XLDNET4	4.0 A	3.8 A*	—
1606-XLDNET8	8.0 A	6.0 A*	—
1606-XL60DR	2.5 A	4.5 A*	—
1606-XL120DR	5.0 A	10 A*	6.0 A
1606-XL240DR	10 A	18 A*	12 A

§ Products with ReservePower.

\* Short circuit current values are temperature dependent for the selected product; i.e., the higher the ambient temperature, the lower the short circuit current.

> Hiccup Overload design.

**Bulletin 1606-(number from table) % Power Supply Quick Guide**

	30...40 W	50 W	60 W	72...80 W	90...100 W	120 W	180 W	240 W	480 W	720 W	960 W
5...5.5V	XLP25A	—	—	—	—	—	—	—	—	—	—
10...12V	XLP30B	—	—	—	—	—	—	—	—	—	—
12...15V	—	XLP50B	—	—	XLP90B	—	XL180B	—	—	—	—
(+/-)12 and 15V	XLP36C	—	—	—	—	—	—	—	—	—	—
24...28V 1-Ph	XLP30E	XLP50E XLP50EZ	XL60D	XLP72E XLS80E	XLP95E XLP100E	XLS120E XL120D	—	XLS240E XL240E XL240EP	XL480E XL480EP XL480EPT	—	—
24...28V 3-Ph	—	—	—	—	—	XL120E-3	—	XL240E-3	XLS480E-3 XL480E-3 XL480E-3W XL480F-3H	XL720E-3	XL960E-3 XL960E-3S
36...43V	—	—	—	—	—	—	—	—	XL480GP	—	—
48...56V	—	XLP50F	—	—	XLP100F	—	—	XL240FP	XL480F	—	—
<b>24V Redundant</b>	—	—	XL60DR	—	—	XL120DR	—	XL240DR XLPRED	XLSRED XLRED20-30	XLRED20-30	<b>XLRED40</b>
DeviceNet	—	—	—	—	XLSDNET4 XLDNET4	—	—	XLSDNET8 XLDNET8	—	—	—

% Example: For a 24...28 Volt, 3-Phase, 120 Watt power supply, the Catalog Number would be 1606-XL120E-3.

**Special Applications**

**Meets NEC Class 2**

- 1606-XLP25A
- 1606-XLP30B
- 1606-XLP30E
- 1606-XLP36C
- 1606-XLP50B
- 1606-XLP50E
- 1606-XLP50EZ
- 1606-XLP50F
- 1606-XLP72E
- 1606-XLP90B
- 1606-XLP95E
- 1606-XL60D
- 1606-XLDNET4
- 1606-XL60DR
- 1606-XLSDNET4

**Meets ABS/GL/RINA (Marine)**

- 1606-XLP25A
- 1606-XLP30E
- 1606-XLP36C
- 1606-XLP50E
- 1606-XLP50EZ
- 1606-XLP72E
- 1606-XLP90B
- 1606-XLP100E
- 1606-XLP100F
- 1606-XLPRED

**Meets Hazardous Location Rating, Class 1 Div. 2**

- 1606-XLS80E
- 1606-XLS120E
- 1606-XLS240E
- 1606-XLS480E-3
- 1606-XLSDNET4
- 1606-XLSDNET8
- 1606-XLSRED
- 1606-XLP25A
- 1606-XLP30B
- 1606-XLP30E
- 1606-XLP50B
- 1606-XLP50E
- 1606-XLP50EZ
- 1606-XLP72E
- 1606-XLP90B
- 1606-XLP95E
- 1606-XLP100E
- 1606-XLPRED
- 1606-XL240E
- 1606-XL240EP

**Meets Semiconductor F47 Sag Immunity Requirements**

Product	Input Mains Voltage	Output Current Range
• 1606-XLS80E	Full Range	Full Range
• 1606-XLS120E	Full Range	Full Range
• 1606-XLS240E	Full Range	Full Range
• 1606-XLS480E-3	Full Range	Full Range
• 1606-XLSDNET4	Full Range	Full Range
• 1606-XLSDNET8	Full Range	Full Range
• 1606-XLP30E	AC 200V or higher	Full Range up to 1.3 A
• 1606-XLP50E	AC 200V or higher	Full Range up to 2.1 A
• 1606-XLP100E	AC 200V or higher	Full Range up to 4.2 A
• 1606-XL60D	AC 120V or higher	Full Range up to 2.5 A
• 1606-XL120D	AC 120V or higher	Full Range up to 5 A
• 1606-XLDNET4	AC 120V or higher	Up to 3 A
• 1606-XL480E	AC 200V or higher	Full Range up to 20 A

**Meets ODVA Requirements**

- 1606-XLSDNET4
- 1606-XLSDNET8

**Bulletin 1606 Product Selection Table**

	Output Power	Output Voltage	Output Current	Input Circuit Protection/UL Test Level	Inrush Current	Parallel Operation (inclined Characteristics)	Meets EN 61000-3-2 (PFC Harmonics)	Cat. No.	
Performance Single and Three Phase	80 W	24...28V DC	3.4 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<7.0 A	Yes	Yes	1606-XLS80E	
	120 W	24...28V DC	5.0 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<4.9 A	Yes	Yes	1606-XLS120E	
	240 W	24...28V DC	10 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<7.6 A	Yes	Yes	1606-XLS240E	
	480 W	24...28V DC	20 A	6 A (X3) SLOW BLOW FUSE OR 1492-SP3C060	<4.0 A	Yes	Yes	1606-XLS480E-3	
	91 W	24V DC	3.8 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<4.9 A	Yes	Yes	1606-XLSDNET4	
	192 W	24V DC	8.0 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<7.6 A	Yes	Yes	1606-XLSDNET8	
Compact Single Phase	25 W	5...5.5V DC	5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP25A	
	30 W	10...12V DC	3.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP30B	
		24...28V DC	1.3 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP30E	
	36 W	+/- 12/15V DC	2.8 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP36C	
	50 W	12...15V DC	4.2 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50B	
		24...28V DC	2.1 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50E	
		24...28V DC	2.1 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50EZ	
		48...56V DC	1.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50F	
	72 W	24...28V DC	3.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	—	N/A	1606-XLP72E	
	90 W	12...15V DC	8.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	Yes	Yes	1606-XLP90B	
	95 W	24...28V DC	3.9 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	—†	Yes	1606-XLP95E	
	100 W	24...28V DC	4.2 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	Yes‡	Yes	1606-XLP100E	
		48...56V DC	2.1 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	Yes‡	Yes	1606-XLP100F	
Standard Single Phase	60 W	24V DC	2.5 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<18 A	—	Yes	1606-XL60D	
	120 W		5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<11 A	—	Yes	1606-XL120D	
	180 W	12...15V DC	15 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	No	1606-XL180B	
	240 W	24...28V DC	10 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	No	1606-XL240E	
			5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	Yes	1606-XL240EP	
	480 W	24...28V DC	20 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<23 A	Yes‡	No	1606-XL480E	
				10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	Yes	1606-XL480EP	
			13.3 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	Yes	1606-XL480EPT	
				10 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	No	1606-XL480F
	Standard Three Phase	120 W	24...28V DC	5.0 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<25 A	—	Yes	1606-XL120E-3
240 W		10 A		6 A (X3) SLOW BLOW FUSE OR 1492-SP3C060/15 A*	<17 A	Yes‡	Yes	1606-XL240E-3	
		20 A		10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<11 A	Yes‡	Yes	1606-XL480E-3	
480 W		20 A		6 A (X3) SLOW BLOW FUSE OR 1492-SP3C060/16 A*	<7 A	Yes‡	Yes	1606-XL480E-3W	
		10 A		10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<15 A	Yes‡	Yes	1606-XL480F-3H	
720 W		30 A		10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<17 A	Yes‡	Yes	1606-XL720E-3	
	960 W	40 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<30 A	Yes‡	Yes	1606-XL960E-3		
			40 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<30 A	Active current sharing	Yes	1606-XL960E-3S	
<b>1606-XL Special Modules</b>									
Special Modules	480 W	23...27.8V DC	20 A	N/A	—	—	N/A	1606-XLBUFFER	
	40 W	5.1V DC	8.0 A	N/A	<5 A	—	No	1606-XLDC40A	
	96 W	24V DC	4.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<11 A	—	Yes	1606-XLDNET4	
	196 W	24V DC	8.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	No	1606-XLDNET8	
	60 W	24V DC	2.5 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A+*	<18 A	Yes‡	N/A	1606-XL60DR	
	120 W		5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A+*	<11 A	Yes‡	Yes	1606-XL120DR	
	240 W		10 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A+*	<21 A	Yes‡	No	1606-XL240DR	
	720 W		V <sub>in</sub> -5V typ	30 A	N/A*	N/A	—	N/A	1606-XLRED20-30
	960 W		V <sub>in</sub> -6V typ	40 A	N/A§	N/A	—	N/A	1606-XLRED40
	384 W	V <sub>in</sub> 1 -9V typ	16 A>	N/A	N/A	—	N/A	1606-XLPRED	
	480 W	V <sub>in</sub> 1 -9V typ	20 A>	N/A	N/A	—	N/A	1606-XLSRED	

- + Used with a pair of identical power supplies to offer N+1 redundancy.
- \* To be used alongside 20, 30 and 40 A power supplies.
- † Single/parallel operation (inclined characteristic) selectable (jumper).
- ‡ To be used alongside 40 A power supplies (or smaller).
- § Unit has internal (not accessible/replaceable) input fuse. Additional protection is not required if used on branch circuits ≤ UL test levels. Consult local codes and regulations for installation.
- > See product specifications for proper use.

**Accessories**

Description	Cat. No.
Back of panel bracket for XL	1606-XLA
Back of panel bracket for XLS	1606-XLB

# Switched Mode Power Supplies

## Approximate Dimensions

### Approximate Dimensions and Wire Size

Approximate dimensions are shown in inches (mm) unless otherwise indicated. Dimensions are not to be used for manufacturing purposes.

**Bulletin 1606 Dimensions Table**

Catalog Number	W	H	D*	Wire Size* (Input and Output unless otherwise noted)
1606-XLS80E	1.26 in (32 mm)	4.88 in (124 mm)	4.02 in (102 mm)	<b>Input*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> ) <b>Output*</b> Stranded 28...12 AWG (0.3...2.5 mm <sup>2</sup> ) Solid 28...12 AWG (0.3...4 mm <sup>2</sup> )
1606-XLS120E	1.57 in (40 mm)	4.88 in (124 mm)	4.61 in (117 mm)	
1606-XLSDNET4				
1606-XLS240E	2.36 in (60 mm)	4.88 in (124 mm)	4.61 in (117 mm)	<b>Input/Output*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )
1606-XLS480E-3	2.56 in (65 mm)	4.88 in (124 mm)	5.00 in (127 mm)	
1606-XLSDNET8	2.36 in (60 mm)	4.88 in (124 mm)	4.61 in (117 mm)	<b>Input/Output*</b> Stranded 28...12 AWG (0.3...2.5 mm <sup>2</sup> ) Solid 28...12 AWG (0.3...4 mm <sup>2</sup> )
1606-XLSRED	1.26 in (32 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XLP25A	1.77 in (45 mm)	2.95 in (75 mm)	3.58 in (91 mm)	<b>Input/Output*</b> Stranded 28...12 AWG (0.3...2.5 mm <sup>2</sup> ) Solid 28...12 AWG (0.3...4 mm <sup>2</sup> )
1606-XLP30B				
1606-XLP30E				
1606-XLP36C				
1606-XLP50B				
1606-XLP50E				
1606-XLP50EZ				
1606-XLP50F				
1606-XLP72E				
1606-XLPRED				
1606-XLP95E				
1606-XLP100E				
1606-XLP100F				
1606-XLP90B	1.93 in (49 mm)	4.88 in (124 mm)	4.02 in (102 mm)	<b>Input/Output*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )
1606-XL60D				
1606-XL120D	2.56 in (64 mm)	4.88 in (124 mm)	4.02 in (102 mm)	<b>Input/Output*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )
1606-XL180B	4.72 in (120 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL240E				
1606-XL240EP				
1606-XL240FP				
1606-XL480E	8.6 in (220 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL480EP				
1606-XL480EPT				
1606-XL480GP				
1606-XL480F				
1606-XL120E-3				2.87 in (73 mm)
1606-XL240E-3	3.50 in (89 mm)	4.88 in (124 mm)	4.61 in (117 mm)	<b>Input/Output*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )
1606-XL480E-3	8.66 in (220 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL480E-3W	5.91 in (150 mm)	4.88 in (124 mm)	4.76 in (121 mm)	
1606-XL480F-3H	8.66 in (220 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL720E-3	9.45 in (240 mm)	4.88 in (124 mm)	4.41 in (112 mm)	
1606-XL960E-3	10.83 in (275 mm)	4.88 in (124 mm)	4.61 in (117 mm)	
1606-XL960E-3S				
1606-XLBUFFER	2.56 in (65 mm)	4.88 in (124 mm)	4.02 in (102 mm)	<b>Input/Output*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )
1606-XLDC40A	1.93 in (49 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XLDNET4	2.56 in (65 mm)	4.88 in (124 mm)	4.02 in (102 mm)	<b>Input/Output*</b> Stranded 22...10 AWG (0.2...2.5 mm <sup>2</sup> ) Solid 22...10 AWG (0.2...2.5 mm <sup>2</sup> )
1606-XLDNET8	4.72 in (120 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XLP50EZ	1.77 in (45 mm)	2.95 in (75 mm)	3.58 in (91 mm)	<b>Input/Output*</b> Stranded 22...12 AWG (0.2...2.5 mm <sup>2</sup> ) Solid 22...12 AWG (0.2...2.5 mm <sup>2</sup> )
1606-XL60DR	1.93 in (49 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL120DR	2.56 in (64 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL240DR	4.72 in (120 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XLRED20-30	1.89 in (48 mm)	4.88 in (124 mm)	4.02 in (102 mm)	<b>Input/Output*</b> Stranded 20...10 AWG (0.5...4 mm <sup>2</sup> ) Solid 20...10 AWG (0.5...6 mm <sup>2</sup> )
1606-XLRED40	1.89 in (48 mm)	4.88 in (124 mm)	4.61 in (117 mm)	



\* Depth measurement does not include DIN rail.

⊗ The wire sizes indicated refer only to the connection capability of the terminal.

For proper operation, the correct wire size must be used (based on accurate determination of the electrical characteristics and loading of the system).



Bulletin 1606 Redundancy Module



	N+1 Redundancy	N+1 Redundancy	N+1 Redundancy	N+1 Redundancy		N+1 Redundancy	N+1 Redundancy
	1606-XLRED20-30	1606-XLRED40	1606-XLPRED	1606-XLSRED	1606-XLERED	1606-XLSRED40	1606-XLSRED80
<b>Output Volts/Watts</b>	30 A Dual redundancy module	40 A Single redundancy module	8 A Dual redundancy	10 A Dual redundancy		20 A Dual redundancy	40 A Dual redundancy
<b>Input Voltage (47...63 Hz)</b>	DC 24V (max. 35V)		DC 10...60V	DC 10...60V		24...28 V DC	24...28 V DC
<b>Operational Range</b>	18...36 V DC		10...60V DC	10...60V DC		24...28 V DC	24...28 V DC
<b>Rated Input Current</b>	20...30 A (max. 35 A)	0...40 A (max. 50 A)	Single input: 8 A max. Dual input: 16 A max. total	Single input: 10 A max. Dual input: 20 A max. total		Single input: 20 A max. Dual input: 40 A max. total	Single input: 40 A max. Dual input: 80 A max. total
<b>Output Voltage</b>	Vin -0.5V typ.	Vin -0.6V typ.	Vin -0.9V typ.	Vin -0.9V typ.		Vin -2.15V typ.	Vin -2.7V typ.
<b>Rated Output Current</b>	20...30 A (max. 35 A)	0...40 A (max. 50 A)	0...10 A	0...20 A		0...40 A	0...80 A
<b>Operating Temperature Range (T<sub>amb</sub>)</b>	-10 °C...+70 °C		-40 °C...+70 °C >60 °C with derating	-25 °C...+70 °C >60 °C with derating		-25 °C...+70 °C >60 °C with derating	-25 °C...+70 °C >60 °C with derating
<b>Dimensions (W x H x D)</b>	48 x 124 x 102 mm	48 x 124 x 117 mm	45 x 75 x 91 mm	32 x 124 x 102 mm	32 x 124 x 117 mm	36 x 124 x 127 mm	46 x 124 x 127 mm
<b>Weight</b>	625 g	646 g	136 g	290 g	350 g	340 g	440 g
<b>Certifications/Standards*</b>	1, 2, 3, 6		1, 2, 3, 6	1, 2, 3, 6		1, 2, 3, 6	1, 2, 3, 6
<b>Special Features</b>	Dual redundancy module for 2x35 A; N+1 redundancy	Single redundancy module for 2.5-50 A; N+1 redundancy	Redundancy for DC 10...60V applications; ABS/GL/RINA (Marine); Class 1 Div. 2	Redundancy for DC 10...60V applications; Class 1 Div. 2	Redundancy for DC 10...60V applications; Class 1 Div. 2; DC OK	Redundancy for DC 24...28V applications; Class 1 Div. 2	Redundancy for DC 24...28V applications; Class 1 Div. 2

\* 1) = CE, 2) = UL 508 (cULus LISTED), 3) = UL 1950 (cURus), 4) = CSA C22.2, No. 60950, 5) Safety standards = IEC/EN 60950, EN 50178, 6) EMC standards = EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, 7) EMC standards = EN 61000-3-2 (A14), EN 50081-1

♣ MTBF determined by Siemens norm SN 29500 at full load current and 40 °C