


# Limitron® Time-Delay, Class L Fuses 600 Volt


CROSS REF  
FOR  
25184-256-03

## KLU 601-4000A

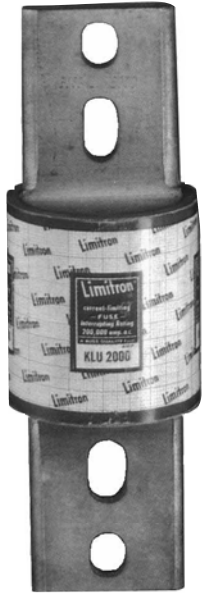

### Dimensional Data

All other tolerances (± 0.02)

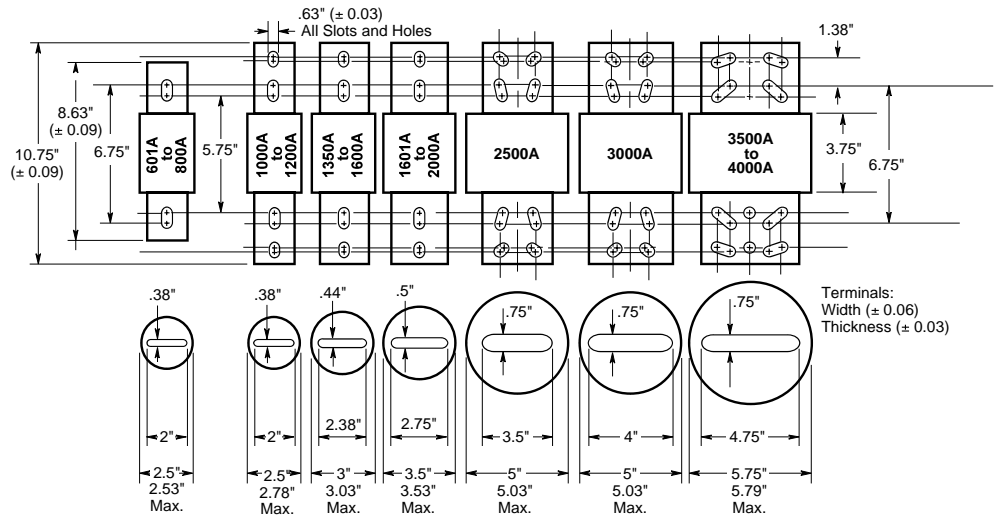

### Catalog Symbol: KLU

Time-Delay – 5 seconds (minimum) at 500% rated current  
Current-Limiting  
Bolt Mount

**Ampere Rating:** 601 to 4000 Amperes\*

**Voltage Rating:** 600 Volts AC (or less)

**Interrupting Rating:** 200,000A RMS Sym.

### Agency Approvals:

UL Listed, Std. 248-10, Class L, Guide JDDZ, File E4273  
CSA Certified, C22.2 No. 248.10, Class 1422-02, File 53787

\*Use KRP-CL for current ratings below 601 amps.

### General Information:

- KLU Limitron® general purpose copper link fuses.
- Copper links result in a minimum 5 second time-delay at 500% ampere rating.
- Current-limiting – provides component short-circuit protection.
- 200,000 AIR complies with NEC Sections 110-9 and 230-65 in today's large capacity systems.
- Selective coordination (blackout prevention).
- No fuse reducers available. See KRP-CL.

### Fuseblocks (601 - 1200 Amps):

Catalog Number	Poles
51215	1
51235	3

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 VAC, 75-1500 VDC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

### Ampere Ratings(600 Volts)†

Catalog Number	Ctn. Qty.	Weight**		Catalog Number	Ctn. Qty.	Weight**	
		Lbs.	Kg.			Lbs.	Kg.
KLU-601	1	3.75	1.70	KLU-1800	1	8.50	3.86
KLU-650				KLU-2000			
KLU-700				KLU-2500			
KLU-800				KLU-3000			
KLU-1000	1	4.25	1.93	KLU-4000			
KLU-1200							
KLU-1500	1	6.00	2.72				
KLU-1600							

†601-3000A is rated 340 VDC and 50 KAIC.

\*\*Weight per carton.