


Product Details and Certifications

Cross Reference RA Part Number: PN-D13175

 **Product: 140G-NS-SNCD**

Description: Frame NS, Shunt Close (SNC), 110-120V AC/DC

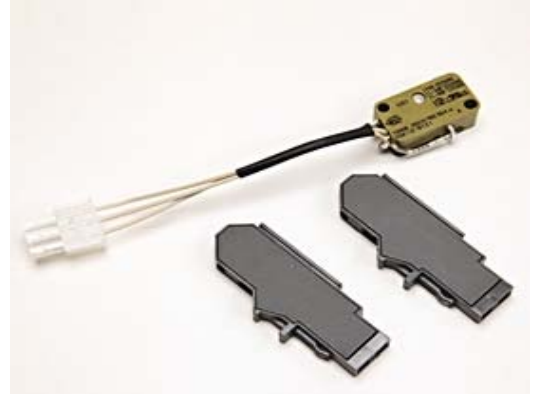

Representative Photo Only (actual product may vary based on configuration sections)

CIRCUIT BREAKER DATA


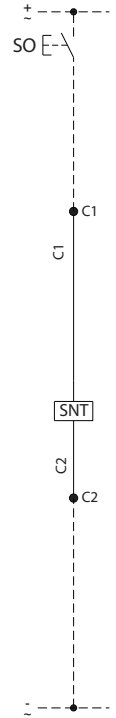

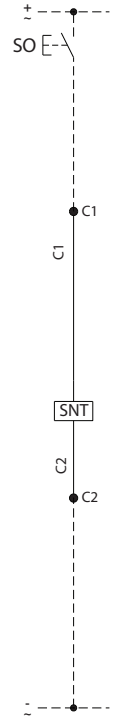

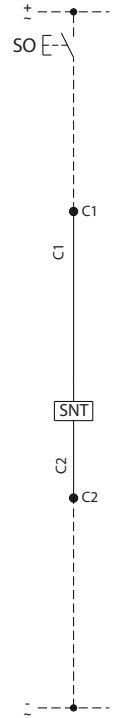
Bulletin Number	140G/140MG
Rating / Frame Size	1200A, NS-Frame

ACCESSORY ITEMS

Shunt Trip & Shunt Close Release	Frame NS, Shunt Close (SNC), 110-120V AC/DC
----------------------------------	---

Shunt Trip (SNT)

- Allows remote tripping of the MCCB by applying control voltage to the shunt trip coil.
- Frames G, H, I, J, K, and M are supplied with 1 meter (39 in.) pig-tail wiring (each terminal wire is marked).
- Frames N and NS are wired internal to the breaker and terminated for connection using a 3-pin quick connector.


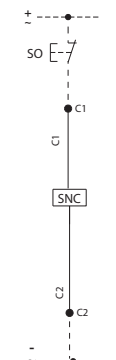
Description		Diagram ⁽¹⁾	Frame Size	Cat. No.	
	12V DC		G, H, I, J	140G-G-SNR	
	24...30V AC/DC			140G-G-SNJ	
	48...60V AC/DC			140G-G-SNKY	
	110...127V AC/110...125V DC			140G-G-SND	
	220...240V AC/220...250V DC			140G-G-SNA	
	380...440V AC			140G-G-SNB	
	480...525V AC			140G-G-SNC	
	12V DC			K, M	140G-K-SNR
	24...30V AC/DC				140G-K-SNJ
	48...60V AC/DC				140G-K-SNKY
	110...127V AC/110...125V DC				140G-K-SND
	220...240V AC/220...250V DC				140G-K-SNA
	380...440V AC				140G-K-SNB
	480...525V AC				140G-K-SNC
	24V AC/DC			N, NS	140G-N-SNJ
	48V AC/DC				140G-N-SNKY
	110...120V AC/DC				140G-N-SND
	220...240V AC/DC				140G-N-SNA
	380...400V AC				140G-N-SNB

(1) For N- and NS-Frame devices, terminals C1 and C2 are designated C11 and C12.

Shunt Close (SNC)

- For use with motorized versions of the NS-Frame MCCB.
- Allows remote closing of the MCCB when the spring motor is charged.

The shunt close unit is wired internal to the MCCB and terminated for connection using a 3-pin quick connect.

Description		Diagram	Frame Size	Cat. No.
	24V AC/DC		NS	140G-NS-SNCJ
	48V AC/DC			140G-NS-SNCKY
	110...120V AC/DC			140G-NS-SNCD
	220...240V AC/DC			140G-NS-SNCA
	380...400V AC			140G-NS-SNCB