

Product Details and Certifications

Cross Reference RA Part Number: 1606-XLDNET8 A



Product: **1606-XLDNET8**

Description: Standard Power Supply (for DeviceNet), 24V DC, 192 W,
100...120V/200...240V AC Input Voltage



Representative Photo Only (actual product may vary based on configuration sections)

POWER SUPPLY DATA

Bulletin Number	1606 Switched Mode Power Supplies
Input Voltage	100...120V/ 200...240V AC, 240...375V DC
Output Voltage	24V
Rated Output Watts	196 W
Operational Range	85...132/176...264V AC
Rated Output Current	8 A
Power Boost	N/A

CERTIFICATIONS AND APPROVALS

UL
CE
IEC/EN
EMC

For UL Certifications Directory:

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

Bulletin	1606-XLP	1606-XL	1606-XLS	1609	1497
Type	Switched Mode Power Supply Single Phase	Switched Mode Power Supply Single/Three Phase	Switched Mode Power Supply Single/Three Phase	Uninterruptible Power Supply	Control Circuit Transformer
Features	<ul style="list-style-type: none"> Low inrush current Wide range input; auto select input Superior overload design (continuous current, no hiccup) NEC Class 2 "Limited Power" Superior efficiency and temperature rating 	<ul style="list-style-type: none"> Low inrush current PFC Choke Wide range input; auto select input Superior overload design (continuous current, no hiccup) NEC Class 2 "Limited Power" Selectable operating mode (single/parallel) Superior efficiency and temperature rating Output signals 	<ul style="list-style-type: none"> Ultra-small size Extra-low inrush current Active Power Factor Correction Wide range AC/DC input; auto select input Superior reserve power (can support 150% rated power for 3..5 seconds) Superior efficiency and temperature rating DC OK and Overload LED 	<ul style="list-style-type: none"> Rugged industrial design DIN Rail or Back of Panel mountable Elevated temperature performance (up to 50°C) Comprehensive network management Remote monitoring/configuration "Dry contact" I/O Line interactive Pure sine wave output 	<ul style="list-style-type: none"> Wide VA range Enclosed construction 63...350 VA Terminal covers finger safe Optional fuse covers available Dual primary and secondary fuse block available to 500 VA Class B insulation (130°C) All welded construction
Output Power (Watts/VA)	25...100 W	60...960 W	80...480 W	325 W/500 VA	63..2000 VA
Input Voltage / Primary Voltage	85...264V AC 85...375V DC	85...132/176...264/340...576V AC 160...375/450...820V DC	85...276/323...552V AC 88...375/450...780V DC	120, 208/230V AC	208...600V
Efficiency	80...90%	87...93%	91.6...95%	96%	—
Output Voltage / Secondary Voltage	5, 10...12, 12, 15, 24, 48V DC	24, 36, 48V DC	24V DC	120, 208/230V AC	24...120V Multi-tap 115...230V (50 Hz)
Rated Output Current	1.3...4.2 A	2.5...40 A	3.4...20 A	4.2 A	—
Operating Temperature Range (Tamb)	-10...+70°C >60°C with derating	-10...+70°C >60°C with derating	-25...+70°C >60°C with derating	0...50°C	—
Non-Operating Temperature Range	-40...+85°C			-20...+60°C	—
Insulation	—	—	—	—	Class B 130°C
Certifications	cULs, CE	cULs, CE	cULs, CE	UL, CSA, CE	cULs, CE
Standards	EN 50081-1, EN 61000-6-2, EN 61000-3-2 (A14) UL 508 UL 1950	EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, EN 61000-3-2 (A14), EN 50081-1 UL 508 UL 1950	EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, EN 61000-3-2 (A14), EN 50081-1 UL 508 UL 1950	EN 50091-1-1, EN 50091-2 (Class 2) UL 1778	EN 60529
Special Application Products	<ul style="list-style-type: none"> Compact Redundancy Module for 10...60V DC 50 W Device with Removable Terminal Blocks Buffer Module for Extended Ride-Through Redundant Power Supplies Redundancy Modules 				
Product Selection	Page 11	Page 11	Page 11	Page 23	Page 27

Switched Mode Power Supplies

Product Overview/Product Sizing



Bulletin 1606 — Power Supplies **

- Quick mounting and connecting, innovative DIN-Rail mount, smallest in class
- Low inrush current limiting
- PFC Active or Passive
- Wide range input; auto select input
- Superior overload design (continuous current, no hiccup)
- NEC Class 2 'Limited Power' options
- Selectable operating mode (single/parallel)
- Superior efficiency and temperature rating

Special Modules

- Brownout buffer, DC to DC converter, N+1 redundancy

Standards Compliance

- World-wide Certifications†
- NEC Class 2
- Class 1 Div. 2 (T3A)
- cULus, CE, C-Tick
- SEMI F47 Compatible
- ABS/GL/RINA (Marine)

Table of Contents

Product Sizing..... this page
 Quick Guide..... page 9
 Special Applications..... page 9
 Cat. No. Explanation..... page 10
 Product Selection..... page 11
 Accessories..... page 11
 Specifications..... page 12
 Special Modules..... page 17
 Approximate Dimensions..... page 18
 1606-XL Redundancy Capabilities..... page 20
 1606-XLBuffer..... page 21

Certifications



* Not all features apply to all power supplies; see individual power supply descriptions for specifics

** A more detailed list of performance specifications can be found at the Allen-Bradley web site

http://www.ab.com/industrialcontrols/products/power_supplies/index.html

† Dual UL rating with cURus 60950 relating to certified use in information technology.

How to Select a Bulletin 1606 Power Supply

The Bulletin 1606 line of Power Supplies is designed with "reserve power" thereby eliminating the need to oversize your power supply to start high inrush loads.

Steps to size a Power Supply

1. Determine the "Average" continuous current of the load and the typical inrush current.
2. Select a power supply where the rated load is at/or below the current of the device and the Peak Current is less than the short-circuit rating of the power supply.


Notes:

- PowerBoost will deliver up to 25% additional current continuously at 40 deg C or less.
- ReservePower will deliver 150% of rated current for up to 4 sec.

Example:

Application: Single Phase 120V input, 24V output, 6 A continuous current @ 35 °C, with 9 A inrush current **Solution:** 1606-XL120D

Output Characteristic for XL120D (5 A) Power Supply

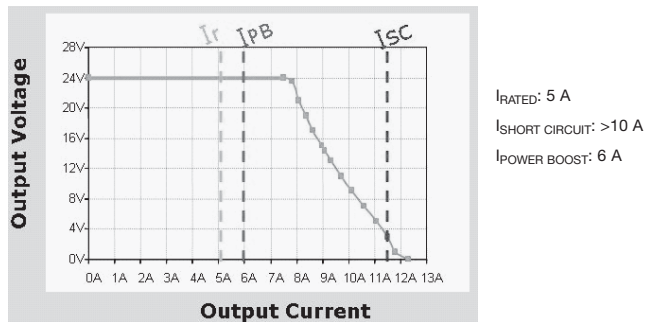

Cat. No.	I_{RATED}	$I_{SHORT\ CIRCUIT\ (25^{\circ}C)}$	$I_{POWER\ BOOST\ OF\ I_{RESERVEPOWER}}$
1606-XLS80E	3.4 A	5.2 A	5.4 A§
1606-XLS120E	5.0 A	9.0 A	7.5 A§
1606-XLS240E	10 A	21 A	15 A§
1606-XLS480E-3	20 A	29 A	30 A§
1606-XLSDNET4	3.8 A	4.0 A	—
1606-XLSDNET8	8.0 A	7.0 A	—
1606-XLP25A	5.0 A	5.0 A	—
1606-XLP30B	3.0 A	4.0 A	—
1606-XLP30E	1.3 A	1.9 A	—
1606-XLP36C	2.8 A	2.0 A	—
1606-XLP50B	4.2 A	4.3 A	—
1606-XLP50E	2.1 A	3.1 A	—
1606-XLP50EZ	2.1 A	3.1 A	—
1606-XLP50F	1.0 A	1.7 A	—
1606-XLP72E	3.0 A	4.5 A	—
1606-XLP90B	8.0 A	8.0 A	—
1606-XLP95E	3.9 A	7.0 A	—
1606-XLP100E	4.2 A	7.1 A	—
1606-XLP100F	2.1 A	3.6 A	—
1606-XL60D	2.5 A	4.5 A*	—
1606-XL120D	5.0 A	10 A*	6.0 A
1606-XL180B	15 A	21 A*	—



Cat. No.	I_{RATED}	$I_{SHORT\ CIRCUIT\ (25^{\circ}C)}$	$I_{POWER\ BOOST\ OF\ I_{RESERVEPOWER}}$
1606-XL240E	10 A	18 A*	12 A
1606-XL240EP	10 A	18 A*	12 A
1606-XL240FP	5.0 A	10 A*	6.0 A
1606-XL480E	20 A	N/A>	25 A
1606-XL480EP	20 A	22 A	25 A
1606-XL480EPT	20 A	22 A	25 A
1606-XL480GP	13.3 A	12 A	16.6 A
1606-XL480F	10 A	24 A	12.5 A
1606-XL120E-3	5.0 A	11 A*	6.0 A
1606-XL240E-3	10 A	22 A*	12 A
1606-XL480E-3	20 A	N/A>	25 A
1606-XL480E-3W	20 A	25 A	25 A
1606-XL480F-3H	10 A	N/A>	12.5 A
1606-XL720E-3	30 A	N/A>	33 A
1606-XL960E-3	40 A	44 A	45 A
1606-XL960E-3S	40 A	44 A	45 A
1606-XLDNET4	4.0 A	3.8 A*	—
1606-XLDNET8	8.0 A	6.0 A*	—
1606-XL60DR	2.5 A	4.5 A*	—
1606-XL120DR	5.0 A	10 A*	6.0 A
1606-XL240DR	10 A	18 A*	12 A

§ Products with ReservePower.

* Short circuit current values are temperature dependent for the selected product; i.e., the higher the ambient temperature, the lower the short circuit current.

> Hiccup Overload design.

Bulletin 1606-(number from table) % Power Supply Quick Guide

	30...40 W	50 W	60 W	72...80 W	90...100 W	120 W	180 W	240 W	300 W	720 W	960 W
5...5.5V	XLP25A	—	—	—	—	—	—	—	—	—	—
10...12V	XLP30B	—	—	—	—	—	—	—	—	—	—
12...15V	—	XLP50B	—	—	XLP90B	—	XL180B	—	—	—	—
(+/-)12 and 15V	XLP36C	—	—	—	—	—	—	—	—	—	—
24...28V 1-Ph	XLP30E	XLP50E XLP50EZ	XL60D	XLP72E XLS80E	XLP95E XLP100E	XLS120E XL120D	—	XLS240E XL240E XL240EP	XL480E XL480EP XL480EPT	—	—
24...28V 3-Ph	—	—	—	—	—	XL120E-3	—	XL240E-3	XLS480E-3 XL480E-3 XL480E-3W XL480F-3H	XL720E-3	XL960E-3 XL960E-3S
36...43V	—	—	—	—	—	—	—	—	XL480GP	—	—
48...56V	—	XLP50F	—	—	XLP100F	—	—	XL240FP	XL480F	—	—
24V Redundant	—	—	XL60DR	—	—	XL120DR	—	XL240DR XLPRED	XLSRED XLRED20-30	XLRED20-30	XLRED40
DeviceNet	—	—	—	—	XLSDNET4 XLDNET4	—	—	XLSDNET8 XLDNET8	—	—	—

% Example: For a 24...28 Volt, 3-Phase, 120 Watt power supply, the Catalog Number would be 1606-XL120E-3.

Special Applications

Meets NEC Class 2

- 1606-XLP25A
- 1606-XLP30B
- 1606-XLP30E
- 1606-XLP36C
- 1606-XLP50B
- 1606-XLP50E
- 1606-XLP50EZ
- 1606-XLP50F
- 1606-XLP72E
- 1606-XLP90B
- 1606-XLP95E
- 1606-XL60D
- 1606-XLDNET4
- 1606-XL60DR
- 1606-XLSDNET4

Meets ABS/GL/RINA (Marine)

- 1606-XLP25A
- 1606-XLP30E
- 1606-XLP36C
- 1606-XLP50E
- 1606-XLP50EZ
- 1606-XLP72E
- 1606-XLP90B
- 1606-XLP100E
- 1606-XLP100F
- 1606-XLPRED

Meets Hazardous Location Rating, Class 1 Div. 2

- 1606-XLS80E
- 1606-XLS120E
- 1606-XLS240E
- 1606-XLS480E-3
- 1606-XLSDNET4
- 1606-XLSDNET8
- 1606-XLSRED
- 1606-XLP25A
- 1606-XLP30B
- 1606-XLP30E
- 1606-XLP50B
- 1606-XLP50E
- 1606-XLP50EZ
- 1606-XLP72E
- 1606-XLP90B
- 1606-XLP95E
- 1606-XLP100E
- 1606-XLPRED
- 1606-XL240E
- 1606-XL240EP

Meets Semiconductor F47 Sag Immunity Requirements

Product	Input Mains Voltage	Output Current Range
• 1606-XLS80E	Full Range	Full Range
• 1606-XLS120E	Full Range	Full Range
• 1606-XLS240E	Full Range	Full Range
• 1606-XLS480E-3	Full Range	Full Range
• 1606-XLSDNET4	Full Range	Full Range
• 1606-XLSDNET8	Full Range	Full Range
• 1606-XLP30E	AC 200V or higher	Full Range up to 1.3 A
• 1606-XLP50E	AC 200V or higher	Full Range up to 2.1 A
• 1606-XLP100E	AC 200V or higher	Full Range up to 4.2 A
• 1606-XL60D	AC 120V or higher	Full Range up to 2.5 A
• 1606-XL120D	AC 120V or higher	Full Range up to 5 A
• 1606-XLDNET4	AC 120V or higher	Up to 3 A
• 1606-XL480E	AC 200V or higher	Full Range up to 20 A

Meets ODVA Requirements

- 1606-XLSDNET4
- 1606-XLSDNET8

Bulletin 1606 Product Selection Table

	Output Power	Output Voltage	Output Current	Input Circuit Protection/UL Test Level	Inrush Current	Parallel Operation (inclined Characteristics)	Meets EN 61000-3-2 (PFC Harmonics)	Cat. No.
Performance Single and Three Phase	80 W	24...28V DC	3.4 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<7.0 A	Yes	Yes	1606-XLS80E
	120 W	24...28V DC	5.0 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<4.9 A	Yes	Yes	1606-XLS120E
	240 W	24...28V DC	10 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<7.6 A	Yes	Yes	1606-XLS240E
	480 W	24...28V DC	20 A	6 A (X3) SLOW BLOW FUSE OR 1492-SP3C060	<4.0 A	Yes	Yes	1606-XLS480E-3
	91 W	24V DC	3.8 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<4.9 A	Yes	Yes	1606-XLSDNET4
	192 W	24V DC	8.0 A	6 A SLOW BLOW FUSE OR 1492-SPU1C060/20 A*	<7.6 A	Yes	Yes	1606-XLSDNET8
Compact Single Phase	25 W	5...5.5V DC	5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP25A
	30 W	10...12V DC	3.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP30B
		24...28V DC	1.3 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP30E
	36 W	+/- 12/15V DC	2.8 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP36C
	50 W	12...15V DC	4.2 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50B
		24...28V DC	2.1 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50E
		24...28V DC	2.1 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50EZ
		48...56V DC	1.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<18 A	—	N/A	1606-XLP50F
	72 W	24...28V DC	3.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	—	N/A	1606-XLP72E
	90 W	12...15V DC	8.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	Yes	Yes	1606-XLP90B
	95 W	24...28V DC	3.9 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	—†	Yes	1606-XLP95E
	100 W	24...28V DC	4.2 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	Yes‡	Yes	1606-XLP100E
		48...56V DC	2.1 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/15 A*	<30 A	Yes‡	Yes	1606-XLP100F
Standard Single Phase	60 W	24V DC	2.5 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<18 A	—	Yes	1606-XL60D
	120 W		5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<11 A	—	Yes	1606-XL120D
	180 W	12...15V DC	15 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	No	1606-XL180B
	240 W	24...28V DC	10 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	No	1606-XL240E
			5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	Yes	1606-XL240EP
	480 W	24...28V DC	20 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<23 A	Yes‡	No	1606-XL480E
				10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	Yes	1606-XL480EP
			13.3 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	Yes	1606-XL480EPT
				10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	No	1606-XL480GP
	48...56V DC	10 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100	<18 A @ 25°C	Yes‡	No	1606-XL480F	
Standard Three Phase	120 W	24...28V DC	5.0 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<25 A	—	Yes	1606-XL120E-3
	240 W		10 A	6 A (X3) SLOW BLOW FUSE OR 1492-SP3C060/15 A*	<17 A	Yes‡	Yes	1606-XL240E-3
			20 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<11 A	Yes‡	Yes	1606-XL480E-3
	480 W	48...56V DC	20 A	6 A (X3) SLOW BLOW FUSE OR 1492-SP3C060/16 A*	<7 A	Yes‡	Yes	1606-XL480E-3W
			10 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<15 A	Yes‡	Yes	1606-XL480F-3H
	720 W	24...28V DC	30 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<17 A	Yes‡	Yes	1606-XL720E-3
			40 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<30 A	Yes‡	Yes	1606-XL960E-3
960 W	24...28V DC	40 A	10 A (X3) SLOW BLOW FUSE OR 1492-SP3C100	<30 A	Active current sharing	Yes	1606-XL960E-3S	
1606-XL Special Modules								
Special Modules	480 W	23...27.8V DC	20 A	N/A	—	—	N/A	1606-XLBUFFER
	40 W	5.1V DC	8.0 A	N/A	<5 A	—	No	1606-XLDC40A
	96 W	24V DC	4.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A*	<11 A	—	Yes	1606-XLDNET4
	196 W	24V DC	8.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A*	<21 A	—	No	1606-XLDNET8
	60 W	24V DC	2.5 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A+*	<18 A	Yes‡	N/A	1606-XL60DR
	120 W		5.0 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/16 A+*	<11 A	Yes‡	Yes	1606-XL120DR
	240 W		10 A	10 A SLOW BLOW FUSE OR 1492-SPU1C100/10 A+*	<21 A	Yes‡	No	1606-XL240DR
	720 W	V _{in} -5V typ	30 A	N/A*	N/A	—	N/A	1606-XLRED20-30
	960 W	V _{in} -6V typ	40 A	N/A§	N/A	—	N/A	1606-XLRED40
	384 W	V _{in} 1 -.9V typ	16 A>	N/A	N/A	—	N/A	1606-XLPRED
	480 W	V _{in} 1 -.9V typ	20 A>	N/A	N/A	—	N/A	1606-XLSRED

- + Used with a pair of identical power supplies to offer N+1 redundancy.
- * To be used alongside 20, 30 and 40 A power supplies.
- † Single/parallel operation (inclined characteristic) selectable (jumper).
- ‡ To be used alongside 40 A power supplies (or smaller).
- § Unit has internal (not accessible/replaceable) input fuse. Additional protection is not required if used on branch circuits ≤ UL test levels. Consult local codes and regulations for installation.
- > See product specifications for proper use.

Accessories






Description	Cat. No.
Back of panel bracket for XL	1606-XLA
Back of panel bracket for XLS	1606-XLB







Switched Mode Power Supplies

Special Module Specifications

1606-XL Special Modules



					
	Buffer Module	DC/DC Converter	DeviceNet	DeviceNet	N+1 Redundancy
	1606-XLBUFFER	1606-XLDC40A	1606-XLDCNET4	1606-XLDNET8	1606-XL60DR
Output Volts/Watts	22.5V...27.8V/480 W	DC 5.1V ±1%	24V/96 W	24V/196 W	24V/60 W
Input Voltage*	DC 24V (DC 24...28.8V)	DC 18...36V	AC 100...120V/200...240V manual select; DC 210...375V	AC 100...120V/200...240V manual select; DC 240...375V	AC 100...120V/200...240V manual select; DC 160...375V
Operational Range	23...35 V DC	18...36 V DC	85...132/176...264 V AC		
Hold-up Time	>0.2s (20 A)	>10 ms (DC 24 Vin)	>37 ms (AC 196V)	>25 ms (AC 196V)	>20 ms (AC 196V)
Rated Input Current	charging current <600 mA	<2.9 A/<1.5 A	<2.0 A (115V)/<1.1 A (230V)	<5.0 A (115V)/<2.3 A (230V)	<1.3 A (115V)/<0.7 A (230V)
Efficiency	N/A	typ. 82%	typ. 88%	typ. 90%	typ. 86.5%
Output Voltage	Vin -1V: 23...27.8V 22.5V fixed	DC 5.1V ±1% selectable from 4.5 to 5.5V	24V	24V	24V
Rated Output Current	0...20 A	8 A	4 A	8 A	2.5 A
Power Boost	—	—	—	—	—
Line/Load Regulation (typ.)	—	<0.18%/<0.45%	<0.04%/<0.5%	<0.04%/<1.0%	<0.04%/<3.0% ▶
Ripple/Noise	<200 mVpp	<50 mVpp	<25 mVpp	<30 mVpp	<30 mVpp
Operating Temperature Range (Tamb)	-10...+70 °C >60 °C with derating	0...+70 °C >60 °C with derating	-10...+70 °C >60 °C with derating	0...+70 °C >60 °C with derating	-10...+70 °C >60 °C with derating
Non-Operating Temperature Range	-40...+85 °C				
MTBF§	480 000 hours	510 000 hours	520 000 hours	390 000 hours	700 000 hours
Dimensions (W x H x D)	64 x 124 x 102 mm	49 x 124 x 102 mm	65 x 124 x 102 mm	120 x 124 x 102 mm	49 x 124 x 102 mm
Weight	740 g	470 g	620 g	980 g	470 g
Certifications/Standards*	1, 2, 3, 5, 6	1, 5, 6	1, 2, 3, 5, 6, 7	1, 2, 3, 5, 6	1, 2, 3, 5, 6
Special Features	Selectable buffered voltage; ‡	MOSFET inverse battery protection; ‡	*Electronically limited to 4 A; NEC Class 2 power supply; Semi F47	*Electronically limited to 8 A; RDY relay contact; N+1 redundancy; plug connectors	RDY relay contact; N+1 redundancy; plug connectors; NEC Class 2 power supply

						
	N+1 Redundancy	N+1 Redundancy	N+1 Redundancy	N+1 Redundancy	N+1 Redundancy	N+1 Redundancy
	1606-XL120DR	1606-XL240DR	1606-XLRED20-30	1606-XLRED40	1606-XLPRED	1606-XLSRED
Output Volts/Watts	24V/120 W	24V/240 W	30 A Dual redundancy module	40 A Single redundancy module	10 A Dual redundancy	20 A Dual redundancy
Input Voltage*	AC 100...120/200...240V manual select; DC 210...375V	AC 100...120/200...240V manual select; DC 240...375V	DC 24V (max. 35V)		DC 10...60V	DC 10...60V
Operational Range	85...132/176...264 V AC		18...36 V DC		10...60V DC	10...60V DC
Hold-up Time	>37 ms (AC 196V)	>25 ms (AC 196V)	—	—	—	—
Rated Input Current	<2.6 A (115V)/<1.4 A (230V)	<6 A (115V)/<2.8 A (230V)	20...30 A (max. 35 A)	0...40 A (max. 50 A)	Single input: 10 A max. Dual input: 16 A max. total	Single input: 20 A max. Dual input: 20 A max. total
Efficiency	typ. 89%	typ. 89%	typ. >97%	typ. >97%	—	—
Output Voltage	24V	24V	Vin -0.5V typ.	Vin -0.6V typ.	Vin -0.9V typ.	Vin -0.9V typ.
Rated Output Current	5 A	10 A	20...30 A (max. 35 A)	0...40 A (max. 50 A)	0...10 A	0...20 A
Power Boost	6 A	12 A	—	—	—	—
Line/Load Regulation (typ.)	<0.04%/<3.0% ▶	<0.04%/<3.0% ▶	N/A	N/A	N/A	N/A
Ripple/Noise	<30 mVpp	<30 mVpp	—	—	—	—
Operating Temperature Range (Tamb)	-10...+70 °C >60 °C with derating	0...+70 °C >60 °C with derating	-10 °C...+70 °C		-40 °C...+70 °C >60 °C with derating	-25 °C...+70 °C >60 °C with derating
Non-Operating Temperature Range	-40...+85 °C					
MTBF§	480.000 hours	390.000 hours	—	—	—	—
Dimensions (W x H x D)	64 x 124 x 102 mm	120 x 124 x 102 mm	48 x 124 x 102 mm	48 x 124 x 117 mm	45 x 75 x 91 mm	32 x 124 x 102 mm
Weight	620 g	980 g	625 g	646 g	136 g	290 g
Certifications/Standards*	1, 2, 3, 5, 6, 7	1, 2, 3, 5, 6	1, 2, 3, 6		1, 2, 3, 6	1, 2, 3, 6
Special Features	RDY relay contact; N+1 redundancy; plug connectors		Dual redundancy module for 2x35 A; N+1 redundancy	Single redundancy module for 2.5-50 A; N+1 redundancy	Redundancy for DC 10...60V applications; ABS/GL/RINA (Marine); Class 1 Div. 2	Redundancy for DC 10...60V applications; Class 1 Div. 2

* 1) = CE, 2) = UL508 (cULus LISTED), 3) = UL1950 (cURus), 5) Safety standards = IEC/EN 60950, EN 50178, 6) EMC standards = EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, 7) = EMC standards = EN 61000-3-2 (A14), EN 50081-1

‡ 47...63Hz

‡ Low inrush current

§ MTBF determined by Siemens norm SN 29500 at full load current and 40 °C

▶ Parallel Mode Load Regulation

Switched Mode Power Supplies

Approximate Dimensions

Approximate Dimensions and Wire Size

Approximate dimensions are shown in inches (mm) unless otherwise indicated. Dimensions are not to be used for manufacturing purposes.

Bulletin 1606 Dimensions Table

Catalog Number	W	H	D*	Wire Size* (Input and Output unless otherwise noted)			
1606-XLS80E	1.26 in (32 mm)	4.88 in (124 mm)	4.02 in (102 mm)	Input* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²) Output* Stranded 28...12 AWG (0.3...2.5 mm ²) Solid 28...12 AWG (0.3...4 mm ²)			
1606-XLS120E	1.57 in (40 mm)	4.88 in (124 mm)	4.61 in (117 mm)				
1606-XLSDNET4							
1606-XLS240E	2.36 in (60 mm)	4.88 in (124 mm)	4.61 in (117 mm)	Input/Output* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²)			
1606-XLS480E-3	2.56 in (65 mm)	4.88 in (124 mm)	5.00 in (127 mm)				
1606-XLSDNET8	2.36 in (60 mm)	4.88 in (124 mm)	4.61 in (117 mm)	Input/Output* Stranded 28...12 AWG (0.3...2.5 mm ²) Solid 28...12 AWG (0.3...4 mm ²)			
1606-XLSRED	1.26 in (32 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XLP25A	1.77 in (45 mm)	2.95 in (75 mm)	3.58 in (91 mm)	Input/Output* Stranded 28...12 AWG (0.3...2.5 mm ²) Solid 28...12 AWG (0.3...4 mm ²)			
1606-XLP30B							
1606-XLP30E							
1606-XLP36C							
1606-XLP50B							
1606-XLP50E							
1606-XLP50EZ							
1606-XLP50F							
1606-XLP72E							
1606-XLPRED							
1606-XLP95E							
1606-XLP100E					2.87 in (73 mm)	2.95 in (75 mm)	4.06 in (103 mm)
1606-XLP100F							
1606-XLP90B	1.93 in (49 mm)	4.88 in (124 mm)	4.02 in (102 mm)	Input/Output* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²)			
1606-XL60D							
1606-XL120D	2.56 in (64 mm)	4.88 in (124 mm)	4.02 in (102 mm)	Input/Output* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²)			
1606-XL180B	4.72 in (120 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XL240E							
1606-XL240EP							
1606-XL240FP							
1606-XL480E							
1606-XL480EP							
1606-XL480EPT	8.6 in (220 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XL480GP							
1606-XL480F							
1606-XL120E-3					2.87 in (73 mm)	4.88 in (124 mm)	4.61 in (117 mm)
1606-XL240E-3					3.50 in (89 mm)	4.88 in (124 mm)	4.61 in (117 mm)
1606-XL480E-3				8.66 in (220 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XL480E-3W	5.91 in (150 mm)	4.88 in (124 mm)	4.76 in (121 mm)	Input/Output* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²)			
1606-XL480F-3H	8.66 in (220 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XL720E-3	9.45 in (240 mm)	4.88 in (124 mm)	4.41 in (112 mm)	Input* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²) Output* Stranded 22...8 AWG (0.5...10 mm ²) Solid 22...8 AWG (0.5...16 mm ²)			
1606-XL960E-3	10.83 in (275 mm)	4.88 in (124 mm)	4.61 in (117 mm)				
1606-XL960E-3S							
1606-XLBUFFER					2.56 in (65 mm)	4.88 in (124 mm)	4.02 in (102 mm)
1606-XLDC40A				1.93 in (49 mm)	4.88 in (124 mm)	4.02 in (102 mm)	
1606-XLDNET4	2.56 in (65 mm)	4.88 in (124 mm)	4.02 in (102 mm)	Input/Output* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²)			
1606-XLDNET8	4.72 in (120 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XLP50EZ	1.77 in (45 mm)	2.95 in (75 mm)	3.58 in (91 mm)	Input/Output* Stranded 22...12 AWG (0.2...2.5 mm ²) Solid 22...12 AWG (0.2...2.5 mm ²)			
1606-XL60DR	1.93 in (49 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XL120DR	2.56 in (64 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XL240DR	4.72 in (120 mm)	4.88 in (124 mm)	4.02 in (102 mm)				
1606-XLRED20-30	1.89 in (48 mm)	4.88 in (124 mm)	4.02 in (102 mm)	Input/Output* Stranded 20...10 AWG (0.5...4 mm ²) Solid 20...10 AWG (0.5...6 mm ²)			
1606-XLRED40	1.89 in (48 mm)	4.88 in (124 mm)	4.61 in (117 mm)				



* Depth measurement does not include DIN rail.

⊗ The wire sizes indicated refer only to the connection capability of the terminal.

For proper operation, the correct wire size must be used (based on accurate determination of the electrical characteristics and loading of the system).

