

Product Details and Certifications

Cross Reference RA Part Number: 193-T1APM A

 **Product: 193-T1APM**

Description: Din Rail/Panel Mount Adapter




Representative Photo Only (actual product may vary based on configuration sections)

ACCESSORY ITEMS

Bulletin Number	193-K, -T1 Bimetallic Overload Relay
Accessory Selection	Individual Accessory Selection

SELECTION

193-K, -T1 Bimetallic Overload Relay	DIN Rail/Panel Mount Adapter
Accessories	



Bulletin 193-T1 — Bimetallic Overload Relays

- Overload protection trip class 10 / 10A
- Phase loss protection
- Ambient temperature compensation
- Auxiliary contacts (1 N.O. and 1 N.C.)
- Manual/automatic reset mode selectable
- Test function for auxiliary contacts
- Stop button
- Trip indicator
- Optional remote reset solenoid and external reset accessories

The 193-T1 bimetallic overload relays are ambient temperature compensated, ensuring that the tripping characteristic of the relay remains constant over an ambient temperature range of -20...+60 °C. These class 10 / 10A overload relays include a differential mechanism for high sensitivity to phase loss conditions and provide reliable motor protection in normal duty applications. In addition, they can be used to protect against overloads in DC-motor and variable frequency drive applications.

Table of Contents

Product Selection..... 1

Accessories..... 2

Specifications..... 3

Approximate Dimensions..... 7







Standards Compliance

IEC/EN 60497-1, -4-1, -5-1
 UL508
 CSA C22.2 No.14

Certifications

cULus (File No. E33916, Guide NKCR, NKCR7),
 CE marked

Add-On Modules

	Description	For Use With	Pkg. Quantity *	Cat. No.
	DIN Rail/Panel Mounting Adapter For separate mounting of overload relays Snaps on to 35 mm top hat rail	193-T1AA, 193-T1AB, 193-T1AC, 193-T1BC	1	193-T1APM
	Screw Adapter For screw fixing of the 193-T1APM panel adapter (1 required per adapter)	193-T1APM	10	140M-C-N45
	Remote Reset Solenoid For remote reset of 193-K and 193-T1 overload relays	193-K, 193-T1 (not for 193-T1DC_P)	1	193-T1R⊗
	External Reset Button For enclosed, through-the-door reset applications. Metal construction, IP66, non-illuminated. Refer to the 800F selection information for additional types.	All	1	800FM-R611
	Reset Rod Length 142 mm, adjustable range 141...159 mm	All	1	800F-ATR08
	Reset Adapter Expands the reset target area when using an external reset	193-K, 193-T1 (not for 193-T1DC_P)	1	193-RA3


* Must be ordered in multiples of package quantity.

⊗ **Coil Voltage Codes for Remote Reset Solenoid**

[M]	24	48	110	120	125	220...240
50 Hz	—	—	D	—	—	—
60 Hz	—	—	—	D	—	—
50/60 Hz	KJ	KY	—	—	—	KF
DC	ZJ	ZY	ZD	—	ZS	—


Dimensions are shown in millimeters (inches). Dimensions are not intended for manufacturing purposes.

Cat. No. 193-T1APM DIN Rail/Panel Mounting Adapter
 (for use with Cat. No. 193-T1BC30...38 Overload Relays)

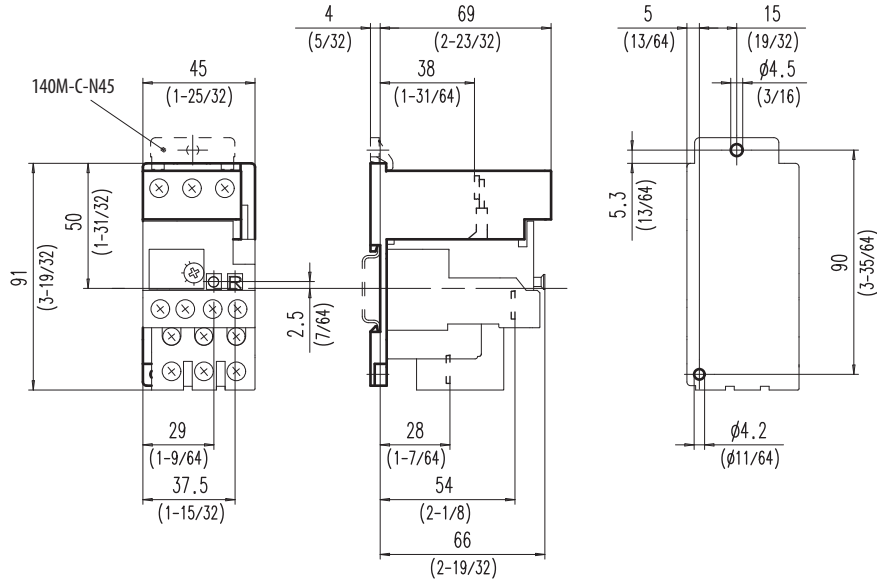

2

Cat. No. 193-RA3 Reset Adapter

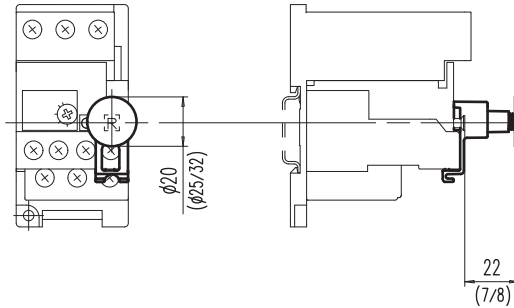

Cat. No. 193-T1R Remote Reset Solenoid

