




Input/Output Simulation Module

1771-SIM

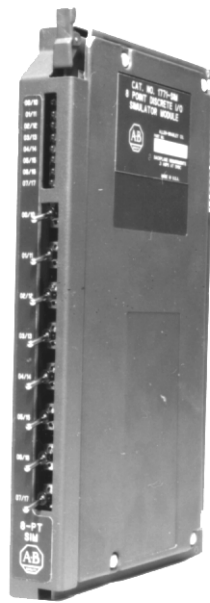


Description

The 1771-SIM Module is an input simulation and output indicating module. It can be inserted into any 1771 Universal I/O chassis.

The switches on this single-slot module simulate open/close devices; the LEDs identify which outputs are active.

Uses

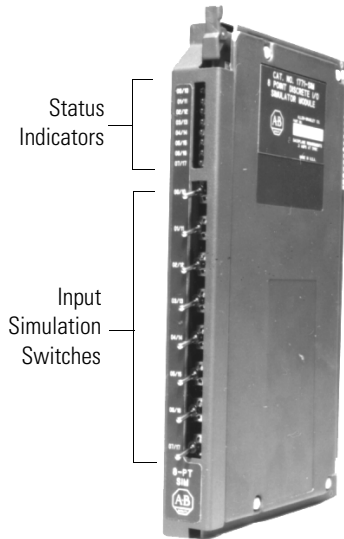

Typical uses include:

- Testing programs for proper response to a specified input
- Testing programs for sending “turn on/turn off” signals to user-defined outputs
- Replacing manual input devices such as temporary switch-and-wire setups; has eight switches, one for each input
- Replacing temporary output test lamps; has eight built-in LEDs, one for each output

ATTENTION



This product must be mounted within a suitable system enclosure to prevent personal injury resulting from accessibility to live parts. The interior of this enclosure must be accessible only by the use of a tool.

IMPORTANT

This industrial control equipment is intended to operate in a Pollution Degree 2 environment, in overvoltage category II applications (as defined in IEC publication 664A), at altitudes up to 2000 meters, without derating.

Connections

All connections and power to the 1771-SIM module are through its backplane connector; therefore, no user-accessible terminals are provided.

Addressing

The module can be inserted into and addressed⁽¹⁾ in either high byte slots or low byte slots.

- INPUT: Each switch can be addressed⁽¹⁾ as either a low byte slot device (00-07₈) or a high byte slot device (10-17₈).
- OUTPUT: Each output indicator can be addressed⁽¹⁾ at either a low byte slot address (00-07₈) or at a high byte slot address (10-17₈).

⁽¹⁾ When installed in the appropriate slot.

Backplane Power

The logic circuitry and the LEDs of the Simulation Module are powered by the I/O chassis power supply. The module requires +5V DC at a maximum of 300mA. Add the current requirements of the module into the total of the other modules in the I/O chassis to check current limits. Do not overload the supply or the I/O chassis backplane.

Specifications

Specifications - 1771-SIM Module

I/O per Module	8 input simulating switches 8 output indicators
Backplane Current	300mA @ +5V DC
Slot Locations	lower or upper byte (Slot 0 or 1)
Environmental Conditions	
Operating Temperature	0 to 60°C (32 to 140°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)
Relative Humidity	5 to 95% (non-condensing)
Keying	between 14 and 16, 24 and 26 NOTE: Check for existing keys before installing the 1771-SIM module.

ATTENTION



This product must be mounted within a suitable system enclosure to prevent personal injury resulting from accessibility to live parts. The interior of this enclosure must be accessible only by the use of a tool.

IMPORTANT

This industrial control equipment is intended to operate in a Pollution Degree 2 environment, in overvoltage category II applications (as defined in IEC publication 664A), at altitudes up to 2000 meters, without derating.

Reach us now at www.rockwellautomation.com

Wherever you need us, Rockwell Automation brings together leading brands in industrial automation including Allen-Bradley controls, Reliance Electric power transmission products, Dodge mechanical power transmission components, and Rockwell Software. Rockwell Automation's unique, flexible approach to helping customers achieve a competitive advantage is supported by thousands of authorized partners, distributors and system integrators around the world.

Americas Headquarters, 1201 South Second Street, Milwaukee, WI 53204, USA, Tel: (1) 414 382-2000, Fax: (1) 414 382-4444
European Headquarters SA/NV, avenue Herrmann Debroux, 46, 1160 Brussels, Belgium, Tel: (32) 2 663 06 00, Fax: (32) 2 663 06 40
Asia Pacific Headquarters, 27/F Citicorp Centre, 18 Whitfield Road, Causeway Bay, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 1771-TD106B-EN-P - June 2001

Supersedes Publication 1771-2.106 - January 1987



**Rockwell
Automation**

PN 957564-45

© 2001 Rockwell International Corporation. Printed in the U.S.A.