



NOTES:

- 1) ALL DIMENSIONS ARE +/- 0.06 UNLESS OTHERWISE NOTED.
- 2) TRANSFORMER IS CSA CERTIFIED (LR33902-88M) AND UL LISTED (E50394 & LISTING #252L) AS TYPE 3AH.
- 3) CE MARKED PER REQUIREMENTS OF IEC 989:1991 AND RELEVANT SECTIONS OF EC LOW VOLTAGE DIRECTIVE 73/23/EEC.
- 4) TRANSFORMER IS TERMINATED WITH #8/32 SLOTTED/TORX(T-20) TERMINAL SCREWS.
- 5) NAMEPLATE TO BE OBTAINED FROM ALLEN-BRADLEY CO, OR SUPPLIER. STAMP NAMEPLATE WITH A-B PART NUMBER, PRIMARY AND SECONDARY VOLTAGES, FREQUENCIES, AND KVA. UL RECOGNIZED "TYPE" DESIGNATION AND CSA "FILE NUMBER" MUST BE STAMPED BY EACH SUPPLIER ON THE NAMEPLATE.
- 6) VPI GLOSS BLACK FINISH OVER ENTIRE TRANSFORMER. WELDED CORE CONSTRUCTION ACCEPTABLE. 80°C TEMPERATURE USE CLASS B (130°C) INSULATION.
- 7) SECONDARY JUMPERS ARE INCLUDED BETWEEN X1-X3, X2-X4.

(4)-0.31 X 0.75 SLOTS

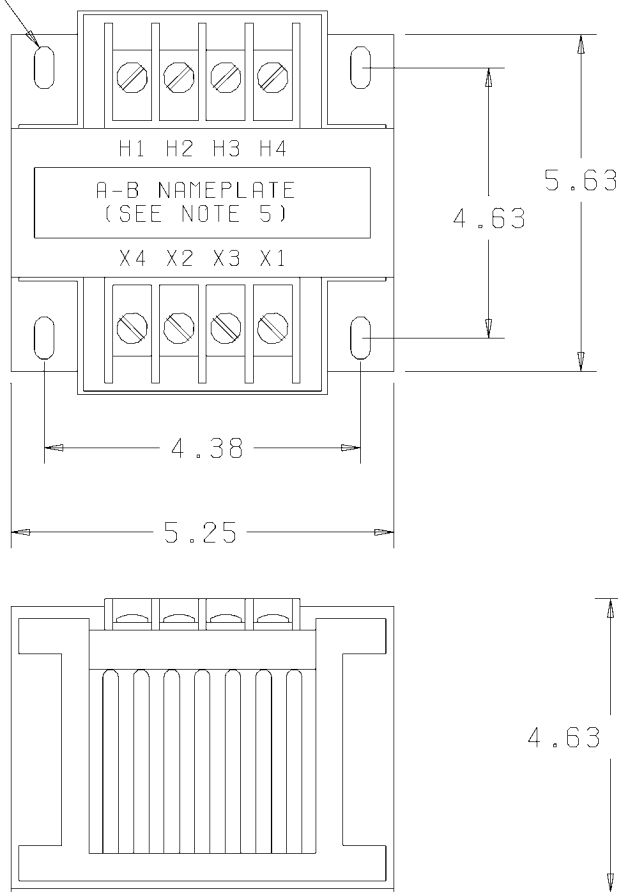

| PRIMARY VOLTAGE | SUPPLY LINES CONNECT TO | SECONDARY VOLTAGE | LOAD LINES CONNECT TO | INSTALL JUMPERS BETWEEN |
|-----------------|-------------------------|-------------------|-----------------------|-------------------------|
| 380             | H1-H2                   | 110-115           | X1-X4                 | X1-X3, X2-X4            |
| 400             | H1-H3                   | 110-115           | X1-X4                 | X1-X3, X2-X4            |
| 415             | H1-H4                   | 110-115           | X1-X4                 | X1-X3, X2-X4            |
| 380             | H1-H2                   | 220-230           | X1-X4                 | X2-X3                   |
| 400             | H1-H3                   | 220-230           | X1-X4                 | X2-X3                   |
| 415             | H1-H3                   | 240               | X1-X4                 | X2-X3                   |

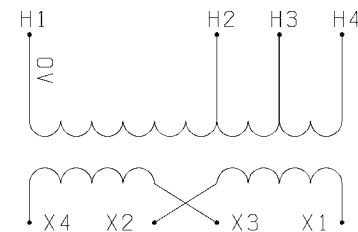

PARTS MUST CONFORM TO APPLICABLE ALLEN-BRADLEY CO. WORKMANSHIP STANDARD 40126-700



| PART NUMBER | CHANGE LETTER |
|-------------|---------------|
| -01         | B             |

|            |               |  |         |  |
|------------|---------------|--|---------|--|
| REFERENCES | NONE          | 500VA 50/60 HZ TRANSFORMER   |         | CV 40121.470.R3.REM  |
| REVISION   | RELEASE       | DIMENSIONS APPLY BEFORE SURFACE TREATMENT (DIMENSIONS IN INCHES) TOLERANCES UNLESS OTHERWISE SPECIFIED |         | <p>ALLEN-BRADLEY<br/>A ROCKWELL INTERNATIONAL COMPANY</p> <p>THIS DRAWING IS THE PROPERTY OF THE ALLEN-BRADLEY CO. INC. AND MAY NOT BE COPIED, USED OR DISCLOSED FOR ANY PURPOSE EXCEPT AS AUTHORIZED IN WRITING BY THE ALLEN-BRADLEY CO. INC.</p> |
| 1          | 21253-97      | 2 PLACE DECIMAL (.XX)<br>± .02   |         |  |
| 2          | 21307-97      | 3 PLACE DECIMAL (.XXX)<br>± .005   |         |  |
| 3          | 21267-98      | ANGLES ± 1°  |         |  |
| DR.        | K.L. JENNINGS | DATE   | 7-24-97 | SHEET 1 OF 1   |
| CHKD.      | N/A           | DATE   | N/A     | DWG. SIZE B  |
| APPDC.     | MALKOWSKI     | DATE   | 7-28-97 | 40121-470  |

Packaged Control Cadds